



PERSPECTIVE ADMINISTRATOR'S GUIDE

Version 5.1.1

November 2016

Perspective by Resolver Inc.™

Version 5.1.1

Distributed November 2016

Copyright © 2016 Resolver Inc. and its licensors. All rights reserved.

Resolver, the Resolver logo, Perspective by Resolver, Dispatch by Resolver, the Perspective by Resolver logo, Perspective Focal Point, and the Incident management from every angle logo are trademarks or registered trademarks of Resolver Inc.

Information in this document is subject to change without notice.

Companies, names, and data used in the examples herein are fictitious unless otherwise noted.

Although every precaution has been taken in preparation of this document, Resolver Inc. assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Permission to modify and distribute this document strictly for the purpose of internal user training is hereby granted, provided that it is made evident the document has been modified, and that all copies contain all proprietary notices set forth in or on the original version. Resolver Inc. assumes no responsibility for errors or omissions resulting from the modification of this document. Resolver Inc. expressly waives all liability assumed for damages resulting from the modification of the information contained herein. Notwithstanding the permission granted herein, no part of this document may otherwise be reproduced, transmitted, disseminated or distributed, in any form or by any means, electronic or mechanical, for any other purpose, without the express written permission of Resolver Inc.

Microsoft, Windows, Windows Vista, Windows Server, SQL Server, Access, Internet Explorer, Excel, PowerPoint, Outlook, Active Directory, Visual Studio, Visual Basic, the Office logo, .NET logo, and Microsoft Gold Independent Software Vendor (ISV) Partner logo are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries.

Wi-Fi is a registered trademark of the Wi-Fi Alliance. All other products, brands, names, or trademarks mentioned in this document may be trademarks or registered trademarks of their respective owners

Table of Contents

Perspective Editions.....	1
Welcome to Perspective by Resolver.....	2
Default Admin Master vs. Users with Administrator Rights	2
Logon Options	2
Logoff	7
Navigation Options.....	7
Security Layer Overview	8
System Administration Components.....	10
General Settings	13
Set the Basic System Settings.....	13
Assign Incident, Case, and Activity Number Formats and Prefixes.....	13
Choose the Default Measurement System for Numeric Data	13
Set your organization's logo and address to print on report cover pages	14
Select the Default Font for Narratives, Summaries, and Interviews	14
Set to Display Organization Privacy Statement or Legal Notice After Logon	14
Hide the All Records View Option on Data Forms and Pick Lists	14
Allow Users to Send Formatted Email Messages.....	15
Define User Password and Logon Parameters.....	15
Select Default Currency, Add New Currencies, and Update Exchange Rates.....	17
Workgroups	19
Add a New Workgroup	19
System Privileges	20
Assign System-Level Visibility and Access Rights.....	20
View Discrepancies Between System-Level Rights and Role or User Rights	22
Roles.....	24
Add a New Role	24
Establish Default Security Controls, Language, and Currency for a Role	25
Select General Role Rights.....	26
Specify Visibility and Access Privileges for a Role	29

View Discrepancies Between Role Rights and User Rights	31
Set Report Visibility for a Role.....	32
View Discrepancies Between Role and User Report Visibility	32
Users.....	34
Add a New User	34
Establish Default Security Controls, Language, and Currency for a User	35
Set General User Rights	37
Specify Visibility and Access Privileges for a User	40
Set Report Visibility for a User	42
Track All Changes Made to a User Account.....	42
Officers (DispatchLog Only)	44
Add a New Officer for Perspective Dispatching	44
License Management.....	45
Concurrent Licenses.....	45
Named Licenses	46
Auditing.....	48
View When, Where, and Who Accessed or Modified a Record	48
Lookups	50
Modify a Single-Tier Lookup List	50
Modify a Multi-Tier or Hierarchical Lookup List.....	51
Specify Workgroup Visibility for a Lookup List Value	53
Enter Call Codes for the Call Category Lookup List	54
Enter Address Information for the Site Lookup List	55
Activity Statuses and Officer Statuses (DispatchLog Only).....	57
The Relationship Between Activity Statuses and Officer Statuses	57
System Values	57
Flags	59
Add a New Incident or Person Flag.....	59
Standard Operating Procedures	61
Create a New Standard Operating Procedure Rule for an Activity	61

Add a Checklist for the SOP	62
Attach a Relevant SOP File.....	63
Add a Relevant SOP Link	65
Set Up Individual and Mass Notifications for the SOP	66
Visual Alerts (DispatchLog Only)	68
Define Visual Representation for Certain Data Types.....	68
Create a New Regulated Time to Act (RTA) Alert	70
Create a New Officer Alert	72
Language	75
Languages	75
Set Languages and Help File Paths	75
Form Labels.....	76
Create a Single Custom Label Set for All Users	76
Create a Custom Label Set for Each User Group in Your Organization	76
Create Custom Report Footers.....	76
Gateway Administration	78
Specify Gateway File Import and/or e-Reporting Access Options for a Workgroup	78
Assign Access Rights to a Gateway Administrator or Gateway Approver	80
Administrative Reports	82
Service Manager.....	83
Index	84
Contact Information	87
Technical Support.....	87
Resolver Inc.....	87

Perspective Editions

The chart below summarizes the Perspective features available by edition. For more information on the edition you're currently running, check your licensing.

	AIR	SOC	ICM	EIM	Essentials	Professional	Enterprise
Features							
Activity Reporting	✓	✓	✓	✓	✓	✓	✓
Incident Reporting	✓	✓	✓	✓	✓	✓	✓
Dispatch		✓		✓		✓	✓
Investigation & Case Management			✓	✓		✓	✓
Visual Analysis	✓*	✓*	✓*	✓*	✓	✓	✓
Reporting, Trending & Analysis Tools	✓	✓	✓	✓	✓	✓	✓
Track losses and financial impact	✓	✓	✓	✓	✓	✓	✓
Report incidents in a Web Portal	✓*	✓*	✓*	✓*	✓	✓	✓
View metrics with Dashboard	✓	✓	✓	✓	✓	✓	✓
Google-like search	✓	✓	✓	✓	✓	✓	✓
Visualize information on a map	✓	✓	✓	✓	✓	✓	✓
iOS App	✓*	✓*	✓*	✓*	✓	✓	✓
System configuration	✓	✓	✓	✓	✓	✓	✓
Workflows	✓*	✓*	✓*	✓*	✓	✓	✓
Open API	✓	✓	✓	✓	✓	✓	✓
Officer Mobile		✓*		✓*		✓*	✓*

*Opt In for Additional Cost

Welcome to Perspective by Resolver

Welcome to Perspective by Resolver™, the industry leader in Incident Reporting and Investigation Management software.

Perspective not only records and tracks incident data, but also assesses and analyzes it to chart trends and report statistics. With the recent incorporation of the centralized dispatching tool Perspective Dispatch, Perspective now also offers an extensive range of dispatching capabilities.

This guide outlines the options and settings available in the **Administration** component of Perspective only, and is developed primarily for designated Perspective Administrators. For information about other components see the [Resolver Support](#) site.


Default Admin Master vs. Users with Administrator Rights

There are differences between the default Admin Master account and a Perspective User with Administrator rights. Specifically, the Admin Master has select features available that other Users, even with Administrator rights, do not.

However, the default Admin Master **can only access the Administration and Dashboard panels of Perspective**. Other components are unavailable to the Admin Master.

Logon Options

1. Ensure Compatibility View is turned off in Internet Explorer:
 - a. Click the gear icon in the top right of the browser.
 - b. Click **Compatibility View Settings**.
 - c. Ensure the **Display intranet sites in Compatibility View** checkbox is unchecked.
 - d. Click **Close**.

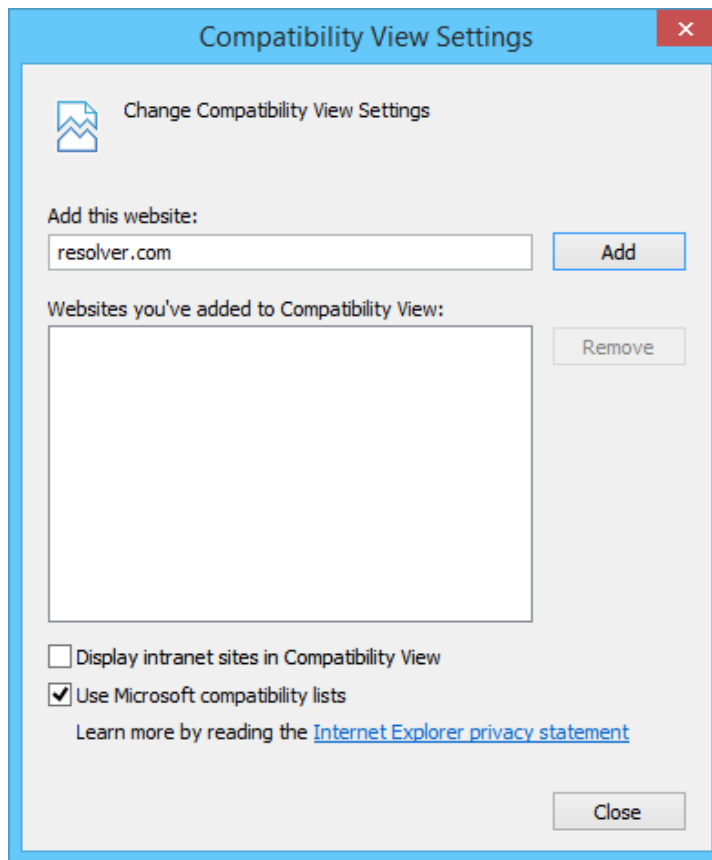



2. Navigate to your Perspective Services URL:

- **For On Premise customers:** *https://<servername>/PerspectiveServices*. <servername> refers to the Perspective Web server installed with Perspective.
- **For Hosted customers:** *https://<businessID>.myincidents.com/perspective/*

3. Click the **Perspective** icon.



4. If launching Perspective for the first time:
 - a. Click **Run** in the **Security Warning** window.
 - b. Configure your login settings:

Note: The  icon indicates that valid information has not yet been entered into mandatory fields. When the required information has been validated, the  will appear next to the fields.

- **For On Premise customers:**
 - i. Click the **Specify Server** tab, if it's not already open.
 - ii. If needed, enter the Perspective Services URL (e.g. <https://<servername>/PerspectiveServices>) in the **Service Folder** field.
 - iii. If your business ID is different from **default**, enter it in the **Business ID** field.

PERSPECTIVE
powered by **RESOLVER**

5.1.0

MyIncidents.com Specify Server

Service URL
https://example/perspectiveservices ✓

Business ID
DEFAULT ✓

Database
Default ▼

☒ Use Default Proxy

Back Cancel

iv. Select the database from the **Database Name** dropdown menu.

v. Click **Back** to return to the previous screen.

- **For Hosted customers:**

i. Click the **MyIncidents.com** tab.

ii. Confirm the database selected in the **Database Name** dropdown is correct.

PERSPECTIVE
powered by **RESOLVER**

5.1.0

MyIncidents.com Specify Server

Database Name:
Default ▼

Back Cancel

iii. Click **Back** to return to the previous screen.

*Note: If the **Database Name** field is missing or login fails, click the **Specify Server** tab to confirm the **Service URL**, **Business ID**, and **Database** fields have populated correctly.*

5. Enter your login credentials:

Note: If your system uses Windows® authentication, the login will be performed automatically. To switch back to the standard Perspective login, press the F5 key on your keyboard.

- a. If you're logging in using single sign-on (SSO) authentication:
 - i. Click **Login**.
 - ii. Enter your username, password, and any other information required by your SSO provider to complete the login process. The SSO settings, including the amount of time your session remains active, are determined by the SSO provider selected by your Perspective administrator.



*Note: If both SSO and Perspective authentication are enabled on your system and you want to log in using your Perspective credentials, click **Login with Perspective**, then enter your user name and password. This option will only appear on the login screen if both Perspective and SSO authentication were enabled at the time of installation or update.*

- b. If you're **not** logging in using single sign-on (SSO) authentication:
 - i. Enter your user name and password in the **User Name** and **Password** fields.
 - ii. Select the **Remember Me** checkbox if you want Perspective to remember your user name.
 - iii. Click **Login**.



The login screen for Perspective, powered by RESOLVER. The header shows the logo and version 5.1. There are links for Settings and Close. The login form includes fields for User Name and Password, a Remember Me checkbox, and a Login button.





Logoff



If you've logged in using single sign-on (SSO) authentication, clicking the **X** at the top right of the screen will not log you out of Perspective, Dispatch, Dashboard, and/or Web Portal. To end your SSO session, click Logoff in the ribbon.

Navigation Options

To start modifying administrative settings, you must first open the **Administration** module on the Navigation pane. By default, the General Settings form will be displayed with the General tab open. Then, select a **component** (e.g., Administration) or a **sub-component** (e.g., Roles) of the program administration that you would like to modify from the menu on the left hand side. The relevant settings and/or fields available for viewing or editing will be displayed in the Visualization pane on the right.

Most of the interface components of the Administration module are equipped with a toolbar that enables the convenient navigation and modification of the administrative settings. Each administrative toolbar includes a number of functions from the list below.

 Save	Preserves your changes to the entity. Complete every editing action with saving the changes applied to the record by clicking Save on the toolbar.
 Edit	Modifies the entity. After clicking Edit, select the entity you wish to edit and make the necessary change.
 Add	Creates a new entity from scratch.
 Delete	Deletes an entire entity. In the confirmation window that pops up, click Yes.

 Cancel	Cancels the changes made to an edited setting.
 Refresh	Displays the saved changes made to an administrative setting.

Security Layer Overview

Perspective provides for a high level of information security. Its unique security layers give you the flexibility to segregate and consolidate vast amounts of data while controlling data visibility through a sophisticated system of *workgroups*, *organizational rollups* and *access levels*, combined with *field* and *function* level security.

Your security layer set-up begins with segregating your data by:

- **Workgroup:** Every record is assigned to one or more workgroups. These workgroups may be based on department, location, corporate level, division or some other structural element of your organization. For example, if your organization chooses to base its workgroup set-up on its departments, sample workgroups could be Human Resources, Investigations, or Security.
- **Organizational Rollup:** Each record may also be assigned an organizational rollup of up to four tiers. Organizational rollups allow you to further compartmentalize data by subdividing workgroups. For example, if you need to segregate data by department and by region, you could establish a workgroup for each department and add organizational rollups that reflect your company's geographic locations (e.g., Africa, Asia, Europe, South America). A four-tier organizational rollup could include continent as the first tier, country as the second, state or province as the third and city as the fourth.
- **Access Level:** Every record is also assigned one of five access levels with Level 1 designating records that are unclassified and Level 5 marking data that is extremely confidential.

Just as every record in Perspective is designated an access level, organizational rollup and one or more workgroups, all users in Perspective are similarly assigned these security protocols. *Users may only view records that fall within the parameters of their access rights.* For example, in the following illustration, the user represented by the yellow highlighting is only able to access records assigned to the Security workgroup and the North America organizational rollup, with an access level of 3 or less.

Workgroups


Human Resources
Investigations
Security

Organizational Rollups

Africa
South America
North America
Pacifica
Asia

Access Levels

1
2
3
4
5

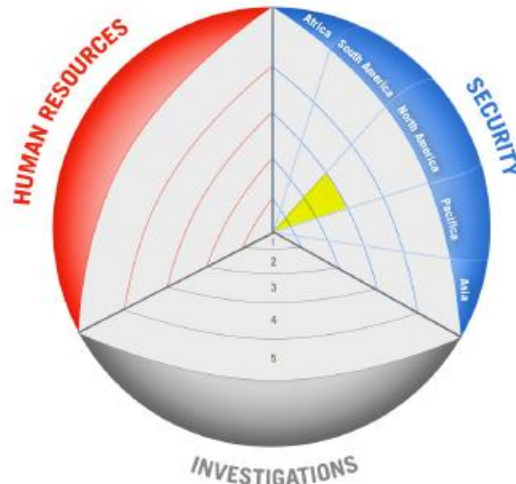

User visibility may be even further refined with *field* and *function* level security. While workgroups, organizational rollups and access levels specify which records a user is able to access, field and function level security options go a step further to specify precisely which sections of a record a user can see (forms, sub-forms and fields), as well as what they are permitted to do with this data (read, add, edit and/or delete).

Within Perspective, user visibility and access rights are assigned at the:

- **System Level:** Default access rights (or privileges) are first applied to all users across the system.
- **Role Level:** Default access rights (or privileges) are inherited from the System level and can then be modified for each role.
- **User level:** Access rights (or privileges) are inherited from the Role level and can then be customized for each user.

System Administration Components

General Settings
General
<ul style="list-style-type: none"> Assign Incident, Case, and Activity Number formats/prefixes. Choose the default measurement system for numeric data. Set your organization's logo and address to print on report cover pages. Select the default font for narratives, summaries and interviews. Set to display your organization's privacy statement or legal notice upon logon. Hide the All Records View option on data forms and pick lists. Allow users to send formatted email messages.
Account Usage Policies
<ul style="list-style-type: none"> Define user password and logon parameters.
Currencies
<ul style="list-style-type: none"> Select the system's default currency, add new currencies and update exchange rates.
Languages
<ul style="list-style-type: none"> Enter new custom languages or label sets into the system.
Administration
Workgroups
<ul style="list-style-type: none"> Add a new workgroup. Specify a workgroup's Gateway import parameters and identifier prefixes.
System Privileges
<ul style="list-style-type: none"> Assign system-level visibility and access rights. View discrepancies between system-level rights and role or user rights.
Roles
<ul style="list-style-type: none"> Create a new role. Establish default security controls, language and currency for a role. Select general role rights. Specify visibility and access privileges for a role. Set report visibility for a role.

- View discrepancies between role and user rights and report visibility.

Users

- Create a new user for Perspective or Dispatch.
- Establish default security controls, language and currency for a user.
- Set general user rights.
- Specify visibility and access privileges for a user.
- Set report visibility for a user.
- Track all changes made to a user account.

Officers

- Create a new officer for Perspective DispatchLog™.
- Lock an officer from displaying in Perspective or Perspective DispatchLog.

Auditing

- View when, where and who accessed or modified a record.
- Enable or disable general and read auditing (Admin Master authority).
- Specify retention period for audit data (Admin Master authority).
- Choose to purge all audit data (Admin Master authority).

Lookups

- Modify a single-tier, multi-tier or hierarchical lookup list.
- Specify workgroup visibility for a lookup list.
- Enter call codes for the Call Category lookup list.
- Enter address information to the Site lookup list.
- Add running text to the Site lookup list for display in Perspective DispatchLog.

Flags

- Create a new incident or person flag.

Standard Operating Procedures (SOP)

- Create a new Standard Operating Procedure rule restricting it to specific call category, site specifications and/or activity status.
- Include the necessary description, checklist, attachments and links.
- Create the relevant notification message and specify the email addresses for their delivery.
- Specify the notification type for mass notifications sent via MIR3SM inEnterpriseTM.

Visual Alerts

- Define the visual representation (i.e., the font and the background color) for the fields that differentiate various Officer Teams, Officer Statuses, Organization Statuses, Priorities and Locations.
- Create Regulated Time to Act (RTA) alerts for activities in Perspective DispatchLog.
- Create Officer Alerts for officers in Perspective DispatchLog whose Status or Site change.

Language***Languages***

- Set custom languages.
- Define custom web help paths.
- Assign dictionaries.

Form Labels

- Create a default label set for all users.
- Create a custom label set for each custom language.
- Create a custom report footer.
- Edit default report titles and labels.

License Management***Concurrent Licenses***

- Displays a list of all users currently logged in to Perspective.
- Lets you know the maximum number of concurrent logins available to you.
- You can end sessions.
- Displays active services.

Named Licenses

- Assign licenses or use the Auto Assign option.
- Displays a list of all users currently logged in to Perspective.
- Displays active services.

General Settings

Set the Basic System Settings

All basic administration settings are located under the **General** tab of the General Settings section that opens by default as you open the Administration component.


Assign Incident, Case, and Activity Number Formats and Prefixes

1. Enter a prefix for all Incident Numbers, Case Numbers and Activity Numbers. If you would prefer not to have a prefix for a specific number type, leave the corresponding fields blank.
2. Choose **Identifier Formats** for Incident, Case, and Activity records from the corresponding lookup lists:
 - **CCYY-MM-#####**: This format identifies the record by the calendar year (CCYY) and month (MM) that it was added to Perspective, followed by a five digit sequential number that re-sets at the beginning of each month. For example, 2011-04-00123 identifies the 123rd incident/case/activity entered in Perspective in April 2011.
 - **CCYY-#####**: This format identifies the record by the calendar year (CCYY) that it was added to Perspective, followed by a six digit sequential number that re-sets at the beginning of each year. For example, 2011-004567 identifies the 4567th incident/case/activity entered in Perspective in 2011.
 - **#####**: This is known as *flat file format*. There is no year or month preceding the number. The first record entered in Perspective will be identified by the number 0000000001, and this sequential numbering will continue indefinitely with no re-set.

Choose the Default Measurement System for Numeric Data

Under **Default Measurement System**, choose **Metric** or **Standard** as the default system for entering numeric data, such as a person's Height, Weight, etc. Note that this setting can be overridden in individual user accounts.


Set your organization's logo and address to print on report cover pages

1. Click the Add icon  in the **Organization** field. A pop-up Entity List window will open.
2. Select the name of a company whose Organization record contains the logo and address you wish to place on report cover pages. If an Organization record does not already exist for your company, use the Quick Add function at the bottom of the pick list to create one, ensuring that you add your company's logo and address to the new record.

Note: Only the primary address will be displayed on the report cover pages, so ensure that the address that you want displayed is set to primary.

Note: This selection may be overridden by choosing a different organization at the workgroup and/or User levels.

Select the Default Font for Narratives, Summaries, and Interviews

1. Under **Default Font**, click the Add icon  in the **Font Name** field. A pop-up Font window will open.
2. Choose the **Font**, **Font Style** and **Size** that will be the new system default for all narrative, summary and interview text. Note that Arial, Tahoma and Times New Roman are the recommended fonts for optimal visualization.
3. Click **OK** to close the pop-up window and apply your selection to the **Font Preview** window.

Set to Display Organization Privacy Statement or Legal Notice After Logon

1. To automatically display your organization's privacy statement after user logon, check the **Display Privacy Statement on logon** box. This will prompt users to read the privacy statement and click OK before Perspective loads.
2. To automatically display your organization's legal notice after user logon, check the **Display Legal Notice on logon** box. This will prompt users to read the legal notice and click OK before Perspective loads.

Hide the All Records View Option on Data Forms and Pick Lists

To hide the All Records View option on data forms and pick lists, check the **Hide All Records View** box. Only the Quick View and Saved View options will now be available for all data forms in the Navigation pane, and only saved views will be available in pick lists.

Allow Users to Send Formatted Email Messages

To allow users to send formatted email messages, check the **Allow Format Email** box. Users will now have the option of sending email messages in plain text or in a formatted HTML table.

Click **Save** after each editing action.

General -> General

General Account Policies Currencies

Save

Identifier Formats

Incident Prefix Incident Identifier Format

Case Prefix Case Identifier Format

Activity Prefix Activity Identifier Format

Default Measurement System

☐ Metric

☒ Standard

Organization

Default Font

Font Name

Font Preview

Font Style

☐ Display privacy statement on logon.

☐ Display legal notice on logon.

☒ Hide All Records View

☒ Allow Format Email

Define User Password and Logon Parameters

1. Open the **Account Policies** tab.
2. Under **Password Length**, set the minimum length for user passwords (6 to 35 characters).
3. Under **Password Uniqueness**, specify whether or not Perspective should keep a history of user passwords. If yes, indicate the number of passwords to be kept in the password history from one to 10. For example, choosing 3 would require a user to go through three passwords before Perspective would allow him or her to re-use a former password.

4. Under **Maximum Password Age**, indicate whether or not passwords should expire after a certain number of days (1 to 180 days). Once a user password has expired, Perspective will prompt the user to select a new password.
5. Under **Password Format**, specify if passwords must contain special characters, both letters and numbers, or both uppercase and lowercase text. You can choose all, none or a combination of these options.
6. Under **Account Lockout**, enable or disable the option to lock out users after a specified number of unsuccessful logon attempts (1 to 9 attempts).
7. In the grid below **Account Lockout**, you can view a list of any users who are currently locked out of Perspective for exceeding the permitted number of unsuccessful logon attempts.
 - To view how long the account has been locked, hover your cursor over the entry in the **Locked Date Time** column.
 - To reset a locked account and allow the user to log in immediately, click the user account to select it, then click **Reset User Account**.
 - To reset all locked user accounts, click **Reset All Users**.
 - Click **Refresh** to refresh the grid.
8. Under **Miscellaneous**, choose to enable or disable users to log on to Perspective from more than one machine at the same time. Also, indicate whether passwords must be different from user IDs. It is recommended that concurrent logons should not be permitted and that passwords should be distinct from user IDs.
9. To reset the settings modified back to the old values, click **Reset**. In the confirmation window that pops up, click Yes. To save the reset, click **Save**.

General

Account Policies

Currencies

Save

Password Length

Minimum Password Length

6

character(s)

Password Uniqueness

☐ Do not keep password history.

☒ Remember

2

password(s)

Maximum Password Age

☒ Password does not expire.

☐ Expires in

90

day(s)

Miscellaneous

☒ Permit concurrent logon from same account.

☒ Password must be different from logon ID.

Password Format

☒ Require alphanumeric.

☒ Require at least one special character.

☒ Require uppercase and lowercase combination.

Account Lockout

☐ No account lockout.

☒ Lockout account after

2

unsuccessful logon attempts

Note: An affected account will be locked out for 30 minutes.

User Name

Domain Name

Database

Locked Date Time

Reset To Defaults

Refresh

Reset User Account

Reset All Users

Select Default Currency, Add New Currencies, and Update Exchange Rates

1. Open the **Currencies** tab.
2. To add a new currency to the list, click **Add**.
3. Enter the currency's **Full Name**, **Code** (abbreviated name), **Symbol** and **Exchange Rate** in the pop-up window.
4. Check the **Base Currency** box to identify the new currency as the default currency of your Perspective database. Note that it is **not recommended** that you change your Base Currency once it has been initially set. Doing so creates inconsistency in your data.
5. Click **OK** in the pop-up window, and then click **Save**.

Currency

Full Name:
Canadian Dollar

Code:
CAD

Symbol:
\$

Exchange Rate:
1.0000

Base Currency: ☐

OK Cancel

6. To update the exchange rates of other currencies in relation to the base currency (the base currency is automatically given an exchange rate of 1.0000), select the currency, click **Edit**, modify the **Exchange Rate** in the pop-up window, and click **OK**.
7. To change the default currency listed under Base Currency, select the currency you wish to set as the new default and click **Edit**. Check the **Base Currency** checkbox in the pop-up window. In the confirmation window that pops up, click **Yes**. If you click No, the old Base Currency will be preserved. Click **OK**.

Note: The Base Currency cannot be deleted. If you wish to delete the current Base Currency, nominate a new Base Currency first, and then delete the unwanted currency entry.

General -> Currencies

General Account Policies Currencies

+ Add Edit Delete

Base Currency

Name US Dollar (USD)
Symbol \$
Exchange Rate 1.0000

Available Currencies

Long Name	Code	Symbol	Exchange Rate	Base Currency
Singapore Dollar	SGD	\$	0.2500	<input type="checkbox"/>
US Dollar	USD	\$	1.0000	<input checked="" type="checkbox"/>
Japanese Yen	JPY	¥	76.1052	<input type="checkbox"/>
Canadian Dollar	CDN	\$	0.3343	<input type="checkbox"/>

Workgroups

Add a New Workgroup

1. Open **Administration, Workgroups** in the Navigation pane, then click **Add**.
2. Enter the **Workgroup Name** and a **Workgroup Description**.
3. From the **Organization** pick list, select the organization that applies to the workgroup. If an applicable Organization record does not exist, use the Quick Add function at the bottom of the entity list to create one, ensuring that you add the logo and address of the organization to the new record. The logo and address (specifically the primary address) are recorded in the selected Organization record will appear on the workgroup's report cover pages.

*Note: If no organization is selected for the workgroup, the organization specified in the **General Settings** form under the **General** tab will be used by default. Organizations can also be assigned at the individual User level, overriding any selections made in General Settings and/or Workgroups.*

4. *Optional:* If you would like incidents associated with this workgroup to be identified with a unique Incident Number, Case Number or Activity Number prefix (that differs from the default prefix assigned under General Settings), enter this in the relevant **Prefix** field.
5. If you would like to allow the workgroup to import reports into the Gateway, check the **Enable Imports to this Workgroup** box. The Gateway tab will open by default. See [Specify Gateway file import options and/or e-Reporting access options for a workgroup](#) in the "Gateway Administration" section of this guide for further information. Note that checking this box *does not* give the workgroup access to the Gateway; it only gives them rights to submit reports to the Gateway. Only designated Gateway Administrators and Gateway Approvers are permitted to access the Gateway.

Note: Incident, Item, Person, Organization and Vehicle reports can be imported through the Import Manager.

6. Click **Save**.


System Privileges

Assign System-Level Visibility and Access Rights

1. Expand the four root nodes of the tree in the left part of the Visualization pane and select a system component, data form or other entity that you wish to work with.
2. Click the checkboxes and radio buttons on the right to define what users can see and how users can manipulate the selected entity:
 - **Visible:** Allows users to see the entity and its related buttons, icons and records, when they access Perspective.
 - **Allow Override:** Allows system-level entity rights to be overridden at a lower level (i.e., Role or User).
 - **Full Control:** Authorizes users to read, create, edit and delete entity records.
 - **Read Only:** Switches entity records to the read-only mode, so that they could not be edited or deleted by users.
 - **Custom:** Grants users the ability to create new entity records (Allow Add), read and edit existing entity records (Allow Edit) and/or delete entity records (Allow Delete).




It is highly recommended that users *not be allowed to delete* any records. A record deletion could compromise the integrity of your system and should be avoided in all but extraordinary circumstances.

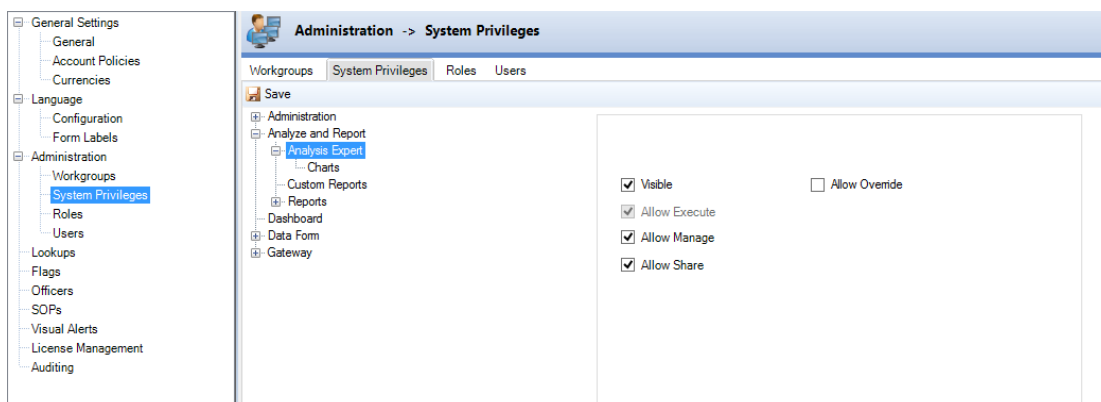

3. Expand the remaining child nodes to display complete list of fields that constitute all the entities. Select a field name in the list.

4. Use the checkboxes on the right to customize users' access rights for the selected field:
- **Required:** Designates the field as a required field that must be completed by users.
 - **Hidden:** Removes the field from the interface (hidden from users).
 - **Hidden On New** (active when the Hidden box is checked): Unchecking this box allows users to see the field in the records that are newly created. Checking both Hidden and Hidden On New options hides the field from both new and existing records.
 - **Locked:** Makes the field visible to the user, but not accessible for data entry or editing. In this case, the field appears greyed out and is locked from use.
 - **Locked On New** (active when the Locked box is checked): Unchecking this box allows users to access the field in the records that are newly created. Checking both Locked and Locked on New options locks the field from use in both new and existing records.
 - **Allow Override:** Allows system-level field rights to be overridden at a lower level (i.e., Role or User).
 - **Allow Execute:** If a user can share a query or custom report, that user can automatically execute them. The Allow Execute checkbox is for visual purposes only.
 - **Allow Manage:** Allows users to add, edit, delete, and clone queries or custom reports. If a user does not have Manage rights, he/she will not be able to add, edit, delete, or clone any queries or custom reports.
 - **Allow Share:** Allows users to share a query or custom report to other users. When a query or custom report owner shares a query, if the shared query or custom report is edited, the owner's copy of that query or custom report will be changed.

Note: Some system entities and fields are required by Perspective, and cannot be Overridden, Hidden or Locked. Whenever you encounter these entities, they will be marked with yellow explanatory Notes, while the unauthorized functions will be greyed out.

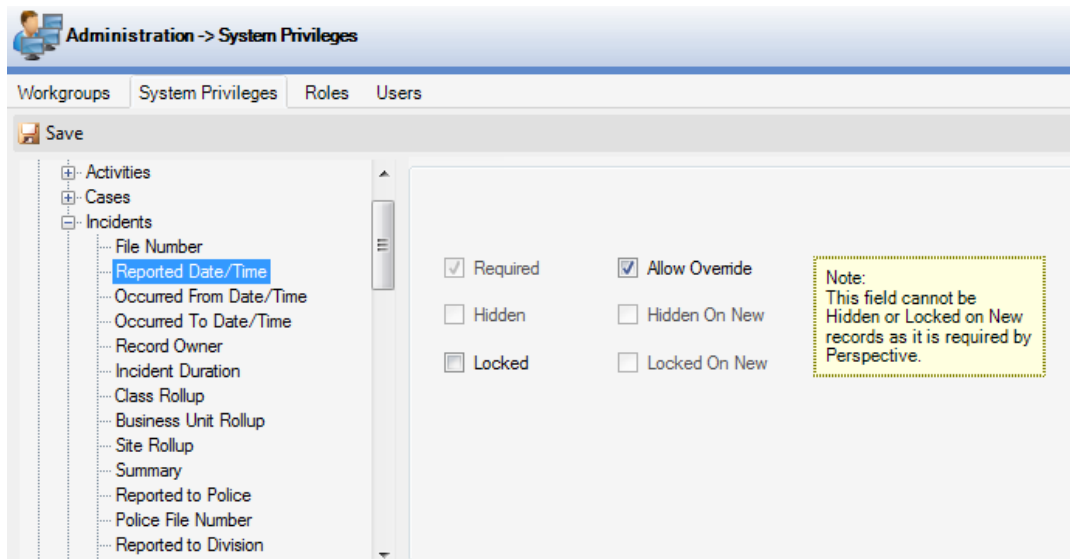

5. Expand the child nodes contained within the field nodes to continue to assign system-level visibility and access rights for as many entities and fields as you wish.
6. Click **Save**.

View Discrepancies Between System-Level Rights and Role or User Rights

1. Expand the nodes to see available entities and fields, and make a selection.
2. By default, the **Roles** tab at the bottom of the screen will open. If any discrepancies exist between the system-level rights for the selected entity or field and a role's rights for the same entity or field, the role and its access rights will be displayed at the bottom.
3. To view discrepancies between the role-level rights for the selected entity or field and a particular user's rights to the same entity or field, click the **Users** tab at the bottom of the screen. If any discrepancies exist, the user's ID and their access rights will be displayed below.

In the illustration below, *davis* is a user whose role is *Security Managers*. On the system level, reports are generally visible for new roles. However, the reports' visibility is disabled for all the users whose role is set to *Security Managers*, except for the user *davis*. The bottom Roles and Users tabs are cross-populated from the grids stored under **Privileges** of the corresponding roles (i.e., under Privileges tab of the *Security Managers* role) and users (i.e., under Privileges tab of the user *davis*) that are accessible from the top Roles and Users tabs in Administration.

Administration -> System Privileges

Workgroups System Privileges Roles Users

Save

- Administration
- Analyze and Report
- Dashboard
- Data Form
- Gateway

☒ Visible ☒ Allow Override

Roles Users

Roles	Visible	Full Control	Read Only	Add Allowed	Edit Allowed	Delete Allowed	Override Allowed
Security Guard	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Security Managers	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Roles Users

Users	Visible	Full Control	Read Only	Add Allowed	Edit Allowed	Delete Allowed
davis	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Roles

All Role settings are located under the **Roles** tab of the **Administration** section in the Administration component.

Add a New Role

1. Click **Add**.
2. Enter the **Role Name** and add a **Description**.
3. Check **Locked** to lock users belonging to the role out of Perspective (e.g., employees on leave, seasonal workers, etc.).
4. Check the **Role Available to Sub-Administrator on New User** box to allow Sub-Administrators to assign this particular role, and its associated rights and privileges, to new user accounts.
5. Check **Don't Allow Override on all Reports** to prevent any of the role's visibility rights for reports from being altered at the User level. This checkbox is only activated once Save is clicked.
6. Click **Save**.

The screenshot shows the 'Administration -> Roles' window. The 'Roles' tab is selected, and a search bar contains 'security'. A list of roles is shown on the left, including 'SECURITY 1', 'Security Guard', and 'Security Managers'. The 'Security Managers' role is selected, and its details are shown on the right. The 'Role Name' is 'Security Managers', and the 'Locked' checkbox is unchecked. The 'Description' is 'This role is created for the managers at the Security Department.' The 'Role Available to Sub Administrator on New User' checkbox is checked, and the 'Don't Allow Override on all Reports' checkbox is unchecked.

Role Name	Locked
SECURITY 1	Unlocked
Security Guard	Unlocked
Security Managers	Unlocked

Security Managers
This role is created for the managers at

Role Name
Security Managers

Description
This role is created for the managers at the Security Department.

☒ Role Available to Sub Administrator on New User

☐ Don't Allow Override on all Reports

Establish Default Security Controls, Language, and Currency for a Role

1. Open the **Role Defaults** tab.
2. Select the workgroups you would like the role to have access to from the **Default Workgroups** list.
3. From the **Default Workgroup** lookup list, select the workgroup the role's users will be working in most often. When a user belonging to this role creates a new record, it will be stored in the role's designated Default Workgroup.
4. Assign a **Default Language** to the role. This determines the field labels that will appear on forms when the role's users are logged on.
5. Assign an organizational rollup to the role in the **Default Org Rollups** section. Organizational rollups are hierarchical, so the option you select in the Org Level 1 field will determine what options are available in the Org Level 2 field and so on. As you move down the hierarchy, organizational rollups become more specific, naming groups within your organization that are increasingly specialized by company division or region. The role will only have access to records with organizational rollups that correspond to, or are lower than, the organizational rollup you select for the role. For example, if a record's organizational rollup is North America/Canada/Alberta and the role's organizational rollup is North America/Canada, the role will have access to the record.
6. Assign a **Default Access Level** to the role. The role will only be permitted to view data with the same or lower access level as its own.
7. Set the **Default Currency** for the role. All currency values entered in Perspective will now appear for the role in this currency.
8. To allow any of the Role Defaults to be overridden at the User level, check the **Allow Override** box directly beneath the relevant default setting, or uncheck the Allow Override box to prevent the setting from being overridden. By default, Allow Override boxes are checked.

The screenshot shows the 'Role Defaults' tab of a configuration window. It includes a 'Default Workgroups' list with '45WG', 'Administrator - PPM2000 Work', and 'Advanced Users' (checked). Below this are checkboxes for 'Allow Override' and dropdowns for 'Default Workgroup' (set to 'Advanced Users'), 'Default Language' (set to 'System English'), and 'Default Currency' (set to 'Canadian Dollar (CDN)'). On the right, 'Default Org Rollups' are configured with dropdowns for 'Org Level 1' (North America), 'Org Level 2' (Canada), 'Org Level 3' (British Columbia), and 'Org Level 4' (Vancouver). Each dropdown has an associated 'Allow Override' checkbox.

Select General Role Rights

1. Select the **Role Rights** tab. The screen will contain a list of general rights with two columns of **Enable** and **Allow Override** checkboxes. By default, all Allow Override boxes will be checked allowing the corresponding role right or set of rights to be overridden at the User level.

The screenshot shows the 'Role Rights' tab. It contains two sections of rights, each with 'Enable' and 'Allow Override' checkboxes. In the first section, 'Enable' is unchecked and 'Allow Override' is checked for all listed rights. The second section follows the same pattern.

Enable	Allow Override	Right
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Administrator
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Sub-Administrator
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Supervisor
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Investigator
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Full History Access
<input type="checkbox"/>	<input checked="" type="checkbox"/>	View Audit History
<hr/>		
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Geo Rollup City Edit
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Metric Measurement Unit
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Gateway Administrator
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Gateway Approver
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Edit Exchange Rates
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Editing All Narratives/Summaries
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Locking Records
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Unlocking Records
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Sealing
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Visual Analysis Access
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Quick Find Access
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Quick Find Preview
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Focal Point Access
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Allow Merge Entities
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Allow Dispatchlog Access
<input type="checkbox"/>	<input checked="" type="checkbox"/>	DispatchLog Read Only

2. Check **Enable** to apply the corresponding right or set of rights to the role's users, and uncheck the **Allow Override** box to prevent the corresponding right or set of rights from being overridden at the User level.

Administrator	<p>Grants the user administrative privileges.</p> <p><i>Note: There are differences between the default Admin Master account and a Perspective User with Administrator rights. See the section Default Admin Master vs. Users with Administrator Rights for more information.</i></p>
Sub-administrator	<p>Allows the role's users to create user accounts and modify User Details and User Defaults, but only for users who are within their default workgroup and who have the same (or lower) access level and organizational rollup as their own.</p>
Supervisor	<p>Identifies the role's users as Supervisors within the system, giving them access to the Controls tab on all records. Among other things, this allows the role's users to change workgroups, organizational rollups and access levels of records.</p>
Investigator (Perspective Premium)	<p>Identifies the role's users as Investigators within the system, giving them access to Investigation forms, tabs and functions.</p>
Full History Access	<p>Allows the role's users to view all incident involvements under the History tabs of Item, Person, Organization and Vehicle records, regardless of the security controls assigned to the records. Note that checking this box will not allow the role's users access to the actual Incident records, only the knowledge that the person, organization, item or vehicle was involved.</p>
View Audit History	<p>Permits the role's users to view all record modifications (including the information as to when and where they were made and who made them) tracked under the Audit History tab of each record.</p>
GeoRollup City Edit	<p>This feature will become functional in a future Perspective release. Please disregard it for now.</p>
Metric Measurement Unit	<p>Allows the role's users to see all measurement data in metric values. Currently, only the Height and Weight fields contain measurement data in Perspective.</p>
Gateway Administrator	<p>Assigns the role's users associated Gateway Administrator access privileges.</p> <p><i>Note: For more information on these roles and what they entail, see the Perspective User's Guide or Perspective's User Help.</i></p>

Gateway Approver	<p>Assigns the role's users associated Gateway Approver access privileges.</p> <p><i>Note: For more information on these roles and what they entail, see the Perspective User's Guide or Perspective's User Help.</i></p>
Edit Exchange Rates	Allows the role's users to update exchange rates under the Currencies tab of General Settings.
Editing All Narratives/Summaries	Allows the role's users to edit any unsealed narratives or summaries, even if they are not the original author.
Locking Records	Allows the role's users to lock records while barring all users from making any changes or additions to the selected records.
Unlocking Records	Allows the role's users to re-instate editing rights to previously locked records.
Sealing	Allows the role's users to seal narratives, summaries and interviews from future editing by any user.
Visual Analysis Access	<p>If your system includes Perspective Visual Analysis, grants the role's users access to the application.</p> <p><i>Note: Visual Analysis is an optional module for Perspective. If you are not certain whether your Perspective system includes this module, please contact Customer Service for verification.</i></p>
Quick Find Access	Grants users access to the Quick Find tool.
Quick Find Preview	Allows users to preview the search results from the Quick Find tool.
Focal Point Access	<p>If your system includes Perspective Focal Point, [†] grants the role's users access to the application.</p> <p><i>Note: Focal Point is an optional module for Perspective. If you are not certain whether your Perspective system includes this module, please contact Customer Service for verification.</i></p>
Custom Search Access	<p>Allows the role's users access to the Custom Search feature.</p> <p><i>Note: This option will only be visible if the Custom Search feature has been configured in the Perspective Service Manager.</i></p>

Allow Merge Entities	Allows the role's users to merge Item, Organization, Person and Vehicle records in the Data Forms component of Perspective.
Allow DispatchLog Access	Grants the role's users access to the Perspective DispatchLog module.
DispatchLog Read Only	Grants the role's users read only rights to view activity details and notes within DispatchLog. Users with these rights cannot add, edit, or delete information in DispatchLog.
Access Level	Allows the role's users to assign an access level to a new record that is higher or different from their own. For example, if the Enable box for the Allow elevate on new records for Access Level right is selected for a role with an Access Level of 3, the role's users will be able to assign Access Levels of 4 or 5 to new records. However, once one of the role's users has assigned an elevated access level to a new record, saved the change and exited the record, the role's users will no longer be permitted access to the record, as it falls beyond the scope of their role privileges.
Workgroup	Allows the role's users to assign a workgroup to a new record that is higher or different from their own.
Org Rollups	Allows the role's users to assign an organizational rollup to a new record that is higher or different from their own.

Specify Visibility and Access Privileges for a Role

1. Open the **Privileges** tab.
2. Expand the four root nodes and select a system component, data form or other entity from the list. The system rights set for the entity will be displayed on the right.
3. To override system rights for this particular role, use the checkboxes and the radio buttons on the right to define what the role's users can see and how users can manipulate the selected entity:
 - **Visible:** Allows users to see the entity and its related buttons, icons and records, when they access Perspective.
 - **Full Control:** Authorizes users to read, create, edit and delete entity records.

- **Read Only:** Switches entity records to the read-only mode, so that they could not be edited or deleted by users.
- **Custom:** Grants users the ability to create new entity records (Allow Add), read and edit existing entity records (Allow Edit) and/or delete entity records (Allow Delete).
- **Allow Override:** Allows role-level entity rights to be overridden at a lower level (i.e., User). By default, Allow Override boxes are checked, unless the **Don't Allow Override on all Forms/Fields** box has been checked on the General tab of this form.



It is highly recommended that users *not be allowed to delete* any records. A record deletion could compromise the integrity of your system and should be avoided in all but extraordinary circumstances.

- Expand the remaining child nodes to display a complete list of fields that constitute all the entities. Select a field name in the list. The field's system rights appear on the right.
- To override system rights for this particular role, use the checkboxes to define the role's access rights for the selected field:
 - **Required:** Designates the field as a required field that must be completed by users.
 - **Hidden:** Removes the field from the interface (hidden from the user).
 - **Hidden On New** (active when the Hidden box is checked): Unchecking this box allows users to see the field in the records that are newly created. Checking both Hidden and Hidden On New options hides the field from both new and existing records.
 - **Locked:** Makes the field visible to the user, but not accessible for data entry or editing. In this case, the field appears greyed out and is locked from use.
 - **Locked On New** (active when the Locked box is checked): Unchecking this box allows users to access the field in the records that are newly created. Checking both Locked and Locked on New options locks the field from use in both new and existing records.

- **Allow Override:** Allows role-level field rights to be overridden at a lower level (i.e., User). By default, Allow Override boxes are checked, unless the Don't Allow Override on all Forms/Fields box has been checked on the General tab of this form.

Note: Some system entities and fields are required by Perspective, and cannot be Overridden, Hidden or Locked. Whenever you encounter these entities, they will be marked with yellow explanatory Notes, while unauthorized functions will be greyed out.

6. Expand the child nodes contained within the field nodes to continue to specify visibility and access rights of the role for as many entities and fields as you wish.
7. Click **Save**.

View Discrepancies Between Role Rights and User Rights

1. Open the **Privileges** tab.
2. Expand the nodes to see available entities and fields, and make a selection.
3. If any discrepancies exist between the role-level rights for the selected entity or field and a user's rights for the same entity or field, the user and their access rights will be displayed at the bottom of the screen.

In the illustration below, the role's report visibility is disabled for all the constituent users, except for the user *davis*.

Save Add Edit Delete Cancel

General Role Defaults Role Rights Privileges Reports

Forms

- Administration
- Analyze and Report
- Dashboard
- Data Form
- Gateway

☐ Visible ☒ Allow Override

Discrepancy Report

User ID	Visible	AllowFullControl	AllowReadOnly	AllowAdd	AllowEdit	AllowDelete
davis	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Set Report Visibility for a Role

1. Open the **Reports** tab.
2. To allow a role's users to see reports listed under Report Title, check the **Visible** boxes beside the report names.
3. To allow any of these report visibility settings to be overridden at the User level, check the **Allow Override** box for the report, or uncheck the Allow Override box to prevent the role's report visibility from being overridden. By default, Allow Override boxes are checked, unless the **Don't Allow Override on all Reports** box has been checked on the **General** tab of this form.
4. Click **Save**.

View Discrepancies Between Role and User Report Visibility

1. Open the **Reports** tab.
2. Select a report listed under Report Title.
3. If any discrepancies exist between the role's visibility for the selected report and a user's visibility for the same report, the user and their visibility setting will be displayed at the **Discrepancy Report** pane.

Save Add Edit Delete Cancel

General Role Defaults Role Rights Privileges Reports

Available Reports

Report Title	Visible	Allow Override
RPT_Reports_CaseAssignmentByPersonReport	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RPT_Reports_CaseLossesReport	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RPT_Reports_CaseReport	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RPT_Reports_CaseSummaryReport	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
RPT_Reports_CaseTotalsReport	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RPT_Reports_ClassClassificationReport	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RPT_Reports_IncidentLossesReport	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
RPT_Reports_IncidentReport	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Discrepancy Report


UserID	Visible
davis	<input checked="" type="checkbox"/>

Users

All Users settings are located under the **Users** tab of the **Administration** section in the Administration component.

Add a New User

1. Click **Add**.
2. Select the name of the user from the **Linked Person** pick list. If a Person record does not already exist for the user, use the Quick Add function to create one. The **First Name** and **Last Name** fields will now automatically populate with information drawn from the linked person's record.
3. Assign a **Role** to the user. All rights and privileges assigned to the role will automatically cascade down to the user.
4. Choose a **Perspective Logon ID** for the person.
5. If your Perspective system uses single sign-on, enter the user's SSO username in the **Corporate ID** field.
6. Click **Set Password** to assign a password to the user account. An Enter Password pop-up window will appear. Enter the password twice and click OK. (Note that once this record has been saved, the Set Password link will be labelled **Change Password**.)

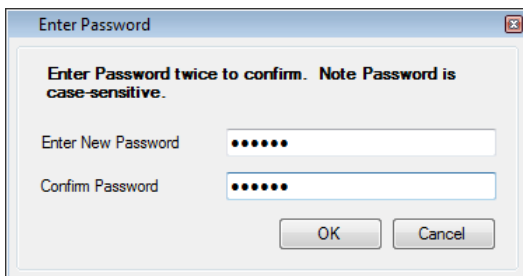A screenshot of a Windows-style dialog box titled "Enter Password". The dialog has a light gray background and a blue title bar. Inside, there is a message: "Enter Password twice to confirm. Note Password is case-sensitive." Below this message are two text input fields. The first field is labeled "Enter New Password" and the second is labeled "Confirm Password". Both fields contain six dots, indicating masked text. At the bottom of the dialog are two buttons: "OK" and "Cancel".

7. Check the **Change Password On Logon** checkbox to force the user to choose a new password the next time they logon to the system. *Note: Only users logging in with a Perspective logon ID will be required to change their password.*
8. Select the name of the person who approved the creation of this user account from the **Approved By** pick list. If a Person record does not already exist for the user, use the Quick Add function to create one.

9. Select the organization that the user belongs to from the **Organization** pick list. If an applicable Organization record does not already exist, use the Quick Add function to create one, ensuring that you add the organization's logo and address to the new record. The logo and address appearing in the selected Organization record will now appear on the user's report cover pages. If no organization is selected for the user, the organization specified for the user's workgroup will be used. If none is specified for the user's workgroup, then the organization selected under the General tab of the General Settings form will be used by default.
10. Enter any other notes in the **Comments** box. You have now completed the **User Details** form. Before saving a user's record, you must enter required default settings for the user account under the User Defaults sub-tab.

The screenshot shows the 'Administration -> Users' window. The 'Users' tab is selected, and the user 'Davis, Ian' is chosen. The 'User Details' sub-tab is active. The form contains the following fields and controls:

- Linked Person:** A pick list showing 'Davis, Ian' with a '+' icon to add more.
- Role:** A dropdown menu set to 'Security Managers'.
- First Name:** Text field containing 'Ian'.
- Last Name:** Text field containing 'Davis'.
- Perspective Logon ID:** Text field containing 'davis'.
- Windows Logon ID:** Empty text field.
- Change Password:** A blue link.
- Change Password On Login:** A checked checkbox.
- Approved By:** A pick list showing 'Wolf, Abner' with '+' and '-' icons.
- Organization:** A pick list showing 'Metropolitan Police' with '+' and '-' icons.
- Comments:** A text area containing 'Ian Davis is the head of the investigation team.'

At the top of the form, there are tabs for 'General', 'Privileges', 'Reports', and 'Audit History'. Below these are sub-tabs for 'User Details', 'User Defaults', and 'User Rights'. The 'User Details' sub-tab is currently selected. At the bottom of the window, there are navigation controls including a back arrow, a forward arrow, and a page indicator '1/1'.

Establish Default Security Controls, Language, and Currency for a User

Note: Any default settings specified for the user's role will automatically be assigned to the user. Verify that these settings are appropriate for the user and, if necessary, complete the following steps to modify them.

1. Open the **General** tab, the **User Defaults** sub-tab.
2. Select the workgroups you would like the user to have access to from the **Workgroups** list.

3. From the **Default Workgroup** lookup list, select the workgroup the user will be working in most often. When the user creates a new record, it will be stored in the user's designated Default Workgroup, unless they assign it to one of their other workgroups.
4. Assign an organizational rollup to the user in the **Org Rollups** section. Organizational rollups are hierarchical, so the option you select in the Org Level 1 field will determine what options are available in the Org Level 2 field and so on. As you move down the hierarchy, organizational rollups become more specific, naming groups within your organization that are increasingly specialized by company division or region. The user will only have access to records with organizational rollups that correspond to, or are lower than, the organizational rollup you select for the user. For example, if a record's organizational rollup is North America/Canada/Alberta and the user's organizational rollup is North America/Canada, the user will have access to the record.
5. Assign an **Access Level** to the user. The user will only be permitted to view data with the same or lower access level as their own.
6. Assign a **Default Language** to the user. This determines the field labels that will appear on forms when the user is logged on.
7. Set the **Default Currency** for the user. All currency values entered in Perspective will now appear for the user in this currency.
8. Check the **Metric measurement unit** box to allow the user to see measurements in metric.
9. To allow the user to assign an access level, organizational rollup and/or workgroup to a new record that is higher or different from their own, check the Allow elevate on new records for **Access Level**, **Org Rollups** and/or **Workgroup** checkboxes. For example, if the Allow elevate on new records for Access Level checkbox is selected for a user with an Access Level of 3, the user will be able to assign Access Levels of 4 or 5 to new records. However, once the user has assigned an elevated access level to a new record, saved the change and exited the record, they will no longer be permitted access to the record, as it falls beyond the scope of their user privileges.
10. Click **Save**.

The screenshot shows the 'User Defaults' tab of a user configuration window. The window has a menu bar with 'Save', '+ Add', 'Edit', 'Delete', and 'Cancel'. Below the menu bar are tabs for 'General', 'Privileges', 'Reports', and 'Audit History'. Under 'General', there are sub-tabs for 'User Details', 'User Defaults' (which is active), and 'User Rights'. The 'User Defaults' section is titled 'Default Settings' and contains several configuration options:

- Workgroups:** A list box with '45WG', 'Administrator - PPM2000 Work', and 'Advanced Users'. 'Advanced Users' is selected.
- Default Workgroup:** A dropdown menu showing 'Advanced Users'.
- Org Rollups:** Four dropdown menus for 'Org Level 1' through 'Org Level 4', with values 'North America', 'Canada', 'British Columbia', and 'Vancouver' respectively.
- Access Level:** A dropdown menu showing 'Level 5 (Highest)'.
- Default Language:** A dropdown menu showing 'System English'.
- Default Currency:** A dropdown menu showing 'Canadian Dollar (CDN)'.
- Allow elevate on new records for:** A group box containing three checked checkboxes: 'Access Level', 'Org Rollups', and 'Workgroup'.
- Metric measurement unit:** A checked checkbox.

Set General User Rights

1. Open the **General** tab, the **User Rights** sub-tab. The screen will contain groups of general rights with checkboxes. The rights that are disabled for the user on their role level will appear greyed out.

The screenshot shows the 'User Rights' sub-tab of the user configuration window. The window has a menu bar with 'Save', '+ Add', 'Edit', 'Delete', and 'Cancel'. Below the menu bar are tabs for 'General', 'Privileges', 'Reports', and 'Audit History'. Under 'General', there are sub-tabs for 'User Details', 'User Defaults', and 'User Rights' (which is active). The 'User Rights' section is titled 'User Rights' and contains a list of rights with checkboxes:

- ☒ Administrator
- ☒ Investigator
- ☐ Sub-Administrator
- ☒ Supervisor
- ☒ Visual Analysis Access
- ☒ Quick Find Access
- ☒ Quick Find Preview
- ☒ Allow Dispatchlog Access
- ☐ DispatchLog Read Only
- ☒ Gateway Administrator
- ☒ Gateway Approver
- ☒ Focal Point Access
- ☒ Full History Access
- ☒ View Audit History
- ☒ Locking Records
- ☒ Unlocking Records
- ☒ Sealing
- ☒ Editing All Narratives/Summaries
- ☒ Allow Merge Entities
- ☐ User Locked
- ☐ Service Account (Password Never Expires)

2. Check the rights that you would like to apply to the user.

Administrator	Grants the user administrative privileges. <i>Note: There are differences between the default Admin Master account and a Perspective User with Administrator rights. See the section Default Admin Master vs. Users with Administrator Rights for more information.</i>
Sub-administrator	Allows the user to create user accounts and modify User Details and User Defaults, but only for users who are within their default workgroup and who have the same (or lower) access level and organizational rollup as their own.
Investigator	Identifies the user as an Investigator within the system, giving them access to Investigation forms, tabs and functions.
Supervisor	Identifies the users as Supervisors within the system, giving them access to the Controls tab on all records. Among other things, this allows the user to change workgroups, organizational rollups and access levels of records.
Visual Analysis Access	If your system includes Perspective Visual Analysis, grants the user access to the application.
Quick Find Access	Grants the user access to the Quick Find tool.
Quick Find Preview	Allows the user to see a preview of the Quick Find tool search results.
Allow DispatchLog Access	Grants the user access to the Perspective DispatchLog module.
DispatchLog Read Only	Grants the user read only rights to view activity details and notes within DispatchLog. Users with these rights cannot add, edit, or delete information in DispatchLog.
Gateway Administrator	Assigns user associated Gateway Administrator access privileges. <i>Note: For more information on these roles and what they entail, see the Perspective User's Guide or Perspective's User Help.</i>
Gateway Approver	Assigns user associated Gateway Approver access privileges. <i>Note: For more information on these roles and what they entail, see the Perspective User's Guide or Perspective's User Help.</i>

Focal Point Access	<p>If your system includes Perspective Focal Point, grants the user access to the application.</p> <p><i>Note: Focal Point is an optional module for Perspective. If you are not certain whether your Perspective system includes this module, please contact Customer Service for verification.</i></p>
Full History Access	<p>Allows the user to view all incident involvements under the History tabs of Item, Person, Organization and Vehicle records, regardless of the security controls assigned to the records. Checking this box will not allow the user access to the actual Incident records, only the knowledge that the person, organization, item or vehicle was involved.</p>
View Audit History	<p>Permits the user to view all record modifications (including when and where they were made and who made them) tracked under the Audit History tab.</p>
Locking Records	<p>Allows the user to lock records while barring all other users from making any changes or additions to the selected records.</p>
Unlocking Records	<p>Allows the user to re-instate editing rights to previously locked records.</p>
Sealing	<p>Allows the user to seal narratives, summaries and interviews from future editing by any user.</p>
Editing All Narratives/Summaries	<p>Allows the user to edit any unsealed narratives or summaries, even if they are not the original author.</p>
Allow Merge Entities	<p>Allows the role's users to merge Item, Organization, Person and Vehicle records in the Data Forms component of Perspective.</p>
Allow Custom Search Access	<p>Allows the role's users access to the Custom Search feature.</p> <p><i>Note: This option will only be visible if the Custom Search feature has been configured in the Perspective Service Manager.</i></p>
User Locked	<p>Locks the user out of the system (e.g., employees who have been terminated, employees on leave, seasonal employees, etc.).</p>

Specify Visibility and Access Privileges for a User

1. Open the **Privileges** tab.
2. Expand the four root nodes and select a system component, data form or other entity from the list. The system and/or role rights set for the entity will be displayed below.
3. To override system and/or role rights for this particular user, use the checkboxes and radio buttons to define what the user can see and how the user can manipulate the selected entity:
 - **Visible:** Allows the user to see the entity and its related buttons, icons and records, when they access Perspective.
 - **Full Control:** Authorizes the user to read, create, edit and delete entity records.
 - **Read Only:** Switches entity records to the read-only mode, so that they could not be edited or deleted by the user.
 - **Custom:** Grants the user the ability to create new entity records (Allow Add), read and edit existing entity records (Allow Edit) and/or delete entity records (Allow Delete).



It is highly recommended that users **not be allowed to delete** any records. A record deletion could compromise the integrity of your system and should be avoided in all but extraordinary circumstances.

The screenshot shows the 'Privileges' tab in the Perspective Administrator's Guide. The 'Entities' list on the left includes Administration, Analyze and Report, Data Form, and Gateway. Under 'Data Form', 'Incidents' is selected. The 'Fields' list on the right is empty. The 'Visible' checkbox is checked. The 'Full Control' radio button is selected. The 'Read Only' radio button is unselected. The 'Custom' radio button is unselected. The 'Allow Add', 'Allow Edit', and 'Allow Delete' checkboxes are all unselected.

4. Expand the remaining child nodes to display a complete list of fields that constitute all the entities. Select a field name. The system and/or role rights set for the field will be displayed below.
5. To override system and/or role rights for this particular user, use the checkboxes to define the user's access rights to the selected field:
 - **Required:** Designates the field as a required field that must be completed by users.
 - **Hidden:** Removes the field from the interface (hidden from the user).
 - **Hidden On New** (active when the Hidden box is checked): Unchecking this box allows users to see the field in the records that are newly created. Checking both Hidden and Hidden On New options hides the field from both new and existing records.
 - **Locked:** Makes the field visible to the user, but not accessible for data entry or editing. In this case, the field appears greyed out and is locked from use.
 - **Locked On New** (active when the Locked box is checked): Unchecking this box allows users to access the field in the records that are newly created. Checking both Locked and Locked on New options locks the field from use in both new and existing records.

Note: Some system entities and fields are required by Perspective, and cannot be Hidden or Locked. Whenever you encounter these entities, they will be marked with yellow explanatory Notes, while the unauthorized functions will be greyed out.

Save Add Edit Delete Cancel

General Privileges Reports Audit History

Entities Fields

- Persons
 - Title
 - First Name
 - Initial
 - Last Name
 - Designation
 - Date of Birth
 - Gender
 - Marital Status
 - Hair Color
 - Eye Color
 - Height
 - Weight
 - Person Photo
 - Employee
 - Investigator
 - Employee Number
 - Supervisor
 - Flag Notes
 - Additional Information
 - Person Attachments
 - Contact Section


Note: System-required field. This field cannot be Hidden or Locked on New.

☒ Required
 ☐ Hidden
 ☐ Hidden On New
 ☐ Locked
 ☐ Locked On New

- Expand the child nodes contained within the field nodes to continue to specify visibility and access rights for the user for as many entities and fields as you wish.
- Click **Save**.

Set Report Visibility for a User

- Open the **Reports** tab.
- To allow a user to see reports listed under Report Title, check the **Visible** boxes beside the report names.
- Click **Save**.

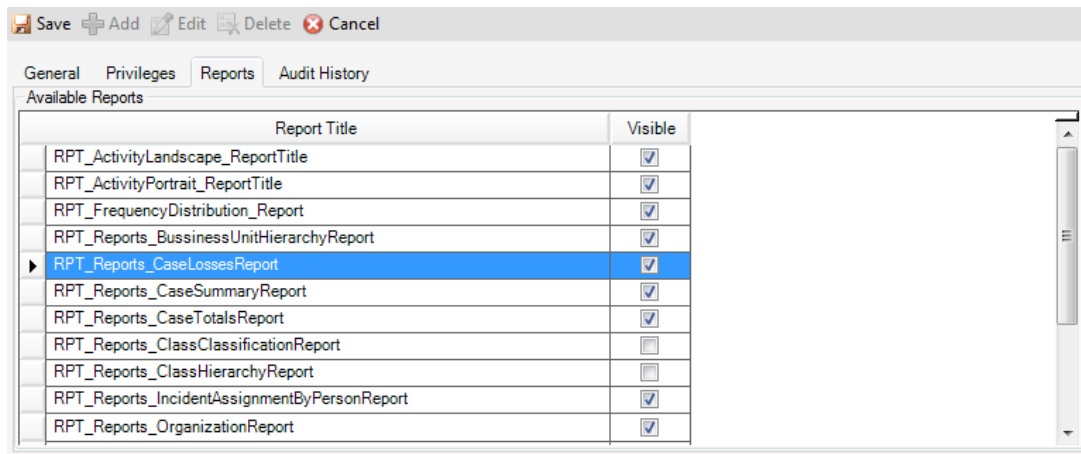

Track All Changes Made to a User Account

- Open the **Audit History** tab.
- Click the **Get Audit History** button to view all modifications made to the user account since its creation. The pane on the left contains entries for each change made to the record. **DateTime** indicates when the change was made; **UserID** reveals who made the change; **Record Action** describes what type of change was made; and **Machine Info** specifies which computer was used to make the change.
- Select an entry to view further details of the change made in the pane on the right. Expand the nodes to see exactly what the data value was **Before** and **After** the change was made.

Save Add Edit Delete Cancel

General Privileges Reports **Audit History**

[Get Audit History](#)

Drag a column header here to group by that column.

DateTime (GMT)	UserID	Record Action	Machine Info
2011/07/20 09:21:01	remnyakova	Updated	192.168.1.94
2011/07/20 09:20:41	remnyakova	Updated	192.168.1.94
2011/07/20 09:19:55	remnyakova	New	192.168.1.94

After: True
SealNarratives
Before: (NULL)
After: True
AllowEditNonAuthorNarratives
Before: (NULL)
After: True
ViewAuditHistory
Before: (NULL)
After: True
RoleName
Before: (NULL)

Summary - yotk

Record Count: 3
User: remnyakova
Record Action: New
Date/Time
Yours: 20/07/2011 3:19:55 PM
Users: 20/07/2011 3:19:55 PM
GMT: 20/07/2011 9:19:55 PM

Officers (DispatchLog Only)

Add a New Officer for Perspective Dispatching

*Note: This section refers to **DispatchLog** settings. For more information on the settings for **Dispatch**, refer to the [Dispatch Administrator's Guide](#) site.*

1. In the Navigation pane, select **Officers**.
2. Click **Add**.
3. Select the name of the officer from the **Involved Person** pick list. If a Person record does not already exist for the user, use the Quick Add function to create one.
4. From the **Default Workgroup** lookup list, select the workgroup to which the officer will normally be administered.
5. Place the officer into a **Team** selecting it from the lookup.
6. In the **Default Call Sign** lookup, select a call sign that will be attributed to the officer once they are brought on duty in Perspective DispatchLog.
7. Under the **Default Location** lookups, select the initial location specifications that will be attached to the officer once they are brought on duty in Perspective DispatchLog.
8. Check the **Officer Locked** box to hide the officer in Perspective DispatchLog.
9. Click **Save**.

The screenshot shows the 'Officers' management interface. On the left, a navigation pane lists various settings, with 'Officers' highlighted. The main window is titled 'Officers' and contains a table of existing officers and a form for adding a new one.

Officer Name	Location	Team
Binkley, Velma	Central	Team 1
Blake, Daphne	Central	Team 1
Bruce, Tom	Central	Team 1
Camillo, Tony	Central	Team 2
Cassidy, Natasha	Central	Team 2
Chan, Peter	Central	Team 2
Clancy, Kevin	Doons	Team 3
Clemments, Dana	Doons	Team 3

The 'Officer Details' form on the right includes the following fields:

- Involved Person:** A pick list showing 'Blake, Daphne'.
- Default Workgroup:** A pick list showing 'Central'.
- Team:** A pick list showing 'Team 1'.
- Default Call Sign:** An empty text field.
- Site:** An empty text field.
- Building:** An empty text field.
- Location:** An empty text field.
- Section:** An empty text field.
- Officer Locked:** A checkbox that is currently unchecked.

License Management

Depending on your licensing, use the License Management tool to access concurrent licenses, or named licenses.

Concurrent Licenses

If you have concurrent licenses, the License Management tool displays a list of all users currently logged in to Perspective, and the maximum number of concurrent logins available to you. You have the ability to end these sessions. The Active Services grid displays a list of any service running on a service account; this takes up a license, and these sessions cannot be ended.

To end a user's session, do the following steps:

1. In the Navigation pane, select **License Management**.
2. Select a user from the User Name list.
3. Click **End Session**.
4. Click **Yes**.

The screenshot displays the 'License Management' tool interface. At the top, there's a header with a lock icon and the text 'License Management'. Below this is a toolbar with 'Save', 'Refresh', and a clock showing '01:50'. The main content area is divided into two sections. The first section, titled '7 Active Sessions' and 'Maximum 25 Of Concurrent Logins', contains a table with columns: 'User Name', 'Domain Name', 'Database', 'Last Action (GMT)', and 'App'. The table lists seven active sessions for users like 'lee', 'gk', 'hradmin', 'gk', 'bb', 'JL', and 'RT', all using 'default' databases and 'Desktop' applications. Below the table is a large empty box and an 'End Session' button. The second section, titled '1 Active Services', contains a table with columns: 'User Name', 'Last Action (GMT)', 'Database', and 'App'. It lists one active service for user 'bb' using a 'default' database and 'Mobile' application. Below this table is another large empty box.

User Name	Domain Name	Database	Last Action (GMT)	App
lee		default	08/08/2013 04:23 PM	Desktop
gk		default	08/08/2013 05:28 PM	Desktop
hradmin		default	08/08/2013 08:58 PM	Desktop
gk		default	08/08/2013 09:56 PM	Desktop
bb		default	08/08/2013 09:05 PM	Desktop
JL		default	08/08/2013 09:54 PM	Desktop
RT		default	08/08/2013 09:34 PM	Desktop

User Name	Last Action (GMT)	Database	App
bb	08/08/2013 6:12 AM	default	Mobile

Named Licenses

If you have named licenses, the License Management tool allows you to assign user licenses, or use the Auto Assign option.

To access your licensed Perspective users, select **License Management**.

The left grid displays a list of all active sessions. The right grid displays a list of all licensed users (the number of licensed users is above this grid, as well as the number of licenses available, and the number of pending releases). The bottom grid displays a list of all active services.

Assign a User

To assign users individually, do the following steps:

1. Click the **Assign** button on the bottom of the screen.
2. Find the user from the entity list that you want to assign a license to.
3. Click **Select**.

Remove a User

You may want to remove a user to free up a license:


1. Click the name (or corresponding row) of the license you want to remove from either the active session list, or the licensed user's list.
2. Click the **Remove** button on the bottom of the screen. A pop-up window will appear.
3. Click **Yes** if you want to remove the license. Click **No** if you do not want to remove the license.
 - It will take 24 hours for the license to become available again.



Auto Assign Users

If you have a large number of users and want to automatically assign each of them a license, do the following steps:

1. Check the Auto Assign box.
 - All users will be assigned licenses.

Note: More than one of the same User Account cannot be used on the same application at the same time. For example, a user cannot be logged into Perspective Desktop Client more than once at the same time, but the same user can be logged into Perspective Desktop Client and Mobile at the same time.

 **License Management**

 Save  Refresh 02:46

6 Active Sessions

User Name	Domain Name	Database	Last Action (GMT)	App
RT		default	08/12/2013 05:38 PM	Desktop
ms1		default	08/12/2013 05:57 PM	Desktop
rc		default	08/12/2013 05:28 PM	Desktop
hadmin		default	08/12/2013 03:50 PM	Desktop
bb		default	08/12/2013 05:41 PM	Desktop
JL		default	08/12/2013 05:48 PM	Desktop

0 Active Services

User Name	Last Action (GMT)	Database	App
RT	08/12/2013 05:38 PM	default	Mobile

Licensed Users : 12 Licenses Available : 13 Pending Release : 0

User Name	Domain Name	Database	License Date
ms1		default	08/12/2013
ASAdmin		default	08/07/2013
bb		Perspective_40...	08/12/2013
gk		default	08/07/2013
rc		Perspective_40...	08/12/2013
RTAdmin		default	08/07/2013
JL		Perspective_40...	08/12/2013
rc		default	08/07/2013
JL		default	08/07/2013
RT		default	08/12/2013
RT		Perspective_40...	08/12/2013
hadmin		Perspective_40...	08/12/2013

☒ Auto Assign

Auditing

View When, Where, and Who Accessed or Modified a Record

1. Select **Auditing** in the Navigation pane.
2. From the **Module** lookup list, choose the system component for which you would like to view audit information:
 - **Activities:** Activity record creations, updates, deletions, and imports are audited.
 - **Administration:** Changes to general settings, system entity privileges, system field privileges, role privileges, workgroups, system languages, and form labels are audited.
 - **Administration – Sessions:** Logon, logoff, ended, and expired sessions are audited.
 - **Administration – System:** *Not applicable.*
 - **Administration – Users:** User creations and updates are audited.
 - **Cases:** Case record creations and updates are audited.
 - **eIncidents:** eIncident record updates are audited.
 - **Incidents:** Incident record creations, updates, and deletions are audited.
 - **Items:** Item record creations and updates are audited.
 - **Organizations:** Organization record creations and updates are audited.
 - **Persons:** Person record creations and updates are audited.
 - **Vehicles:** Vehicle record creations and updates are audited.
3. If you would like to view record modifications made by a particular user, select the name of the user from the **User ID** pick list.
4. Specify a **Date Range** to narrow your search results temporally.
5. Click **Search**. Results will be displayed in the panes below. The pane on the left contains entries for each change made to the record. The details reflected in the list of entries (i.e., column headings) vary depending on the module selected. Generally, the entries indicate the date and time the change was made (Date/Time), who made the change (UserID), where the change was applied (Record

Description), what type of change was made (Record Action), which computer was used to make the change (Machine Info), as well as other module-specific information.

6. Select an entry to view further details of the change made in the pane on the right. Expand the nodes to see what the data value was **Before** and **After** the change was made.

Note: Functions 7-11 are only available when logged in as the default Admin Master user.

7. To ensure the system continues to track the creation and modification of records in the selected module, leave the **Audit Enabled** box checked. Unchecking this box will disable audit functionality.
8. To allow the system to track when records are accessed and read in the selected module, check the **Audit Reads** box. Perspective will only keep track of this information once this box is checked; the system cannot audit retroactively.
9. To specify how long the system should store audit information for the selected module, click **Keep data indefinitely** or choose the number of days (1-180) in **Retention Period**.
10. Click **Purge all audit data** to clear the system of the module's stored audit information.
11. Once you have altered the Retention Period of audit data, or clicked the Audit Reads or Audit Enabled box, click **Save Changes**.

Auditing

Module: Incidents

User ID: WT Date Range From: 2014-04-08 Date Range To: 2014-06-25 Search

Date/Time...	User ID	Record De...	Record...	Co...	Machine I...
2014-05-30...	WT	ISMK-2014-0...	New		10.50.0.62
2014-06-02...	WT	ISMK-2014-0...	Updated		10.50.0.62
2014-06-02...	WT	ISMK-2014-0...	New		10.50.0.62
2014-06-03...	WT	ISMK-2014-0...	New		10.50.0.62
2014-06-03...	WT	ISMK-2014-0...	New		10.50.0.62
2014-06-19...	WT	QAINC00086...	Updated		10.50.0.62
2014-06-19...	WT	QAINC00086...	Updated		10.50.0.62

Date/Time bb: 2014-05-30 10:15:12 AM -- WT: 2014-05-30 10:15:12 AM -- GMT: 2014-05-30 4:15:12 PM

- After: 3cdcfe71-36a3-4041-a545-c207eba90fa8
- WorkgroupID
 - Before: (NULL)
 - After: fc2f412a-91d2-41f9-a4c5-34b09aeac589
- Owner
 - Before: (NULL)
 - After: True
- Read
 - Before: (NULL)
 - After: False
- Update
 - Before: (NULL)
 - After: False
- AllWorkgroups
 - Before: (NULL)
 - After: False

☒ Audit Enabled ☐ Audit Reads

Retention Period: ☐ Keep data indefinitely ☒ Expires in 90 days

Purge All Save

Lookups

A “lookup” is a controlled part of Perspective’s interface which is represented by a single-string field with an attached list of options to choose from (e.g., the *Vehicle Color* drop-down list or *Site Rollup*). There are two types of lookups in Perspective—single-tier lookups and multi-tier lookups.

A **single-tier lookup** is an independent lookup that does not imply any subordinate lookups. For example, the *Vehicle Color* drop-down list may provide a choice of such values as “Silver”, “Black” or “Blue”, which does not pre-define the choices that are available for lookups that describe other vehicle properties, like *Vehicle Style* or *Vehicle Model*.

In contrast, a **multi-tier lookup**—also known as “rollup”—is a complex architecture of hierarchically dependent lookups, where the value selected for the first lookup in the sequence pre-defines the values available for the following lookup. For example, the *Vehicle Make Model Rollup* consists of the embedded lookups *Vehicle Make* (e.g., Audi, BMW, etc.) and *Vehicle Model* (e.g., A3, Q7, etc. for Audi; 630csi, M6, etc. for BMW).

To edit the content of lookups that are available in Perspective, use the **Lookups** section in the Administration component.

Modify a Single-Tier Lookup List

1. Click once to select one of the lookup categories in the alphabetized list and display its content on the right. Double-click to select a category and see the associated forms at the bottom of the screen with the Language tab open by default.
2. Select the type of modification required and follow the procedures below:
 - To add a new option to the selected lookup list, click the **Add New** button and type the option in the **Custom English** field. Although Custom English is the default language for all lookups, you can enter language-specific lookup options in the appropriate language/label set text fields. Custom English lookup options still appear for users assigned to other languages, if there are no alternative lookup options specified for their assigned language.
 - To edit an option in the selected lookup list, click on the option to highlight it, and edit the text in the **Custom English** field.
 - To delete an option from the selected lookup list, highlight the option in the list, and click the **Delete** button. Note that you will not be able to delete any lookup list options that have already been used in existing Perspective records. If this occurs, you can hide the value from visibility so users cannot choose the value from the lookup list when completing a record. See [“Specify Workgroup Visibility for a Lookup List Value”](#) on page 51 for further details.

3. Click **Save**.


The screenshot shows the 'Lookups' window. On the left is a tree view of lookup categories. The main pane displays the 'Inactive' lookup list with options like 'Escalated to Investigations', 'Inactive', 'No Further Action Taken', etc. Below this is a table with columns 'Language' and 'Visibility'. At the bottom are 'Add New' and 'Delete' buttons. Numbered callouts are: 1. 'Add New' button, 2. 'Inactive' option in the list, and 3. 'Save' button in the top toolbar.

Modify a Multi-Tier or Hierarchical Lookup List


1. Multi-tier lookup lists (rollups) appear in capital letters at the bottom of the list. Double-click on one rollup name to display the hierarchical list of its options on the right and see the associated forms at the bottom of the screen with the Language tab open by default.
2. Expand the nodes of the rollup. Each rollup has up to four tiers of options for users to select from (e.g., the Class Rollup consists of Class, Category, Subcategory and Type).
 - The first tier is the **Root** of the rollup (e.g., Class in the Class Rollup). The option selected in the first tier determines what options are available in the second tier and so forth.
 - The higher tier in the hierarchy is the **Parent field**, while the lower tier is the **Child field**. For example, Class is the parent field to the Category child field.
 - Any child fields that are on the same tier of the hierarchy are **Sibling fields**. In other words, all Class fields are siblings to each other; all Category fields are siblings to each other, and so on.
4. Select the type of modification required and follow the procedures below:
 - To delete an option from a rollup, select the option and click **Delete**. If the option has child fields, you must first delete all of the option's child fields before deleting the option itself. Note that you will be unable to delete any rollup options that are already saved in existing records. If this occurs, you can hide the value from visibility so users cannot choose the value from the lookup list when

completing a record. See ["Specify Workgroup Visibility for a Lookup List Value"](#) on page 51 for further details.


- To add an option to the first tier of a rollup hierarchy, click **Add Root**, or select one of the first-tier options (e.g., Criminal) and click **Add Sibling**.

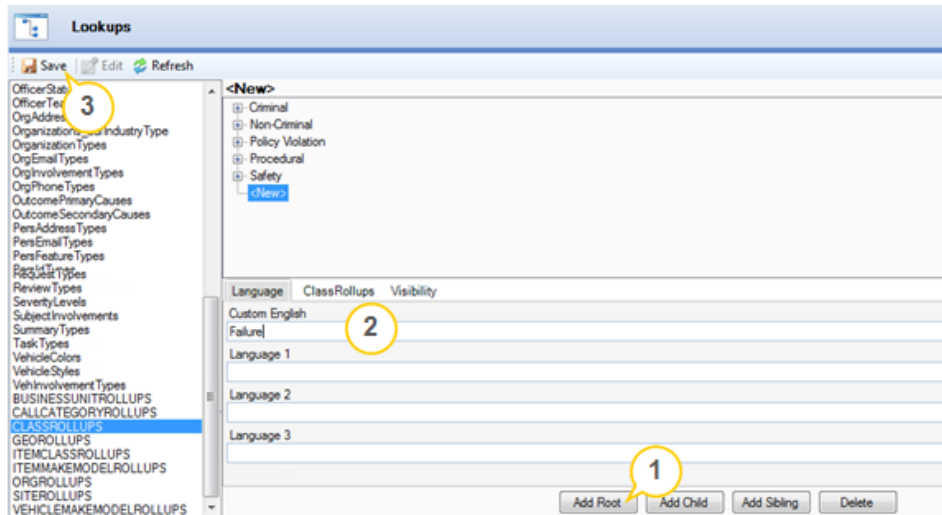

- To add an option to the second (or lower) tier of a rollup hierarchy, select one of the first-tier (or higher-tier) options (e.g., Failure) and click **Add Child** (e.g., Software).

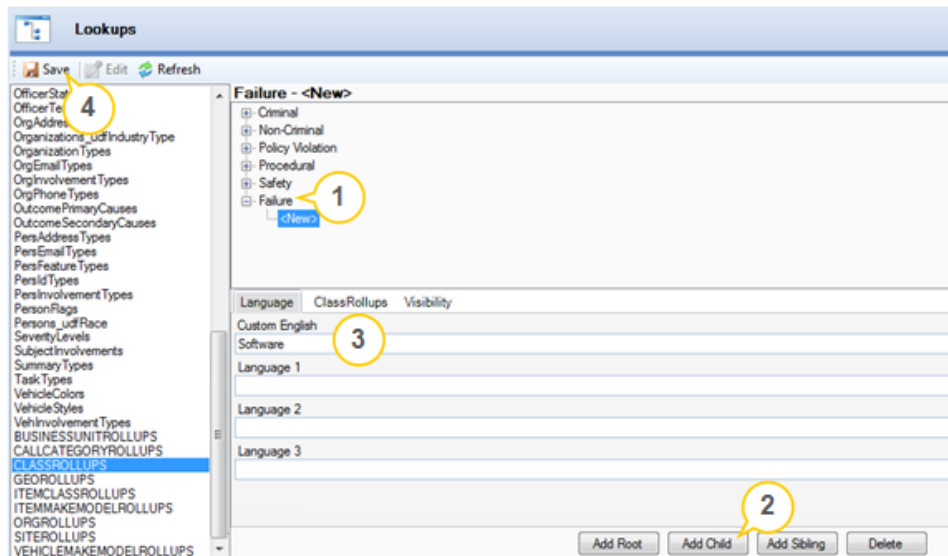

- To add a new option to a tier that already contains other options, select an item in the tier (e.g., Software), and click **Add Sibling** (e.g., System).

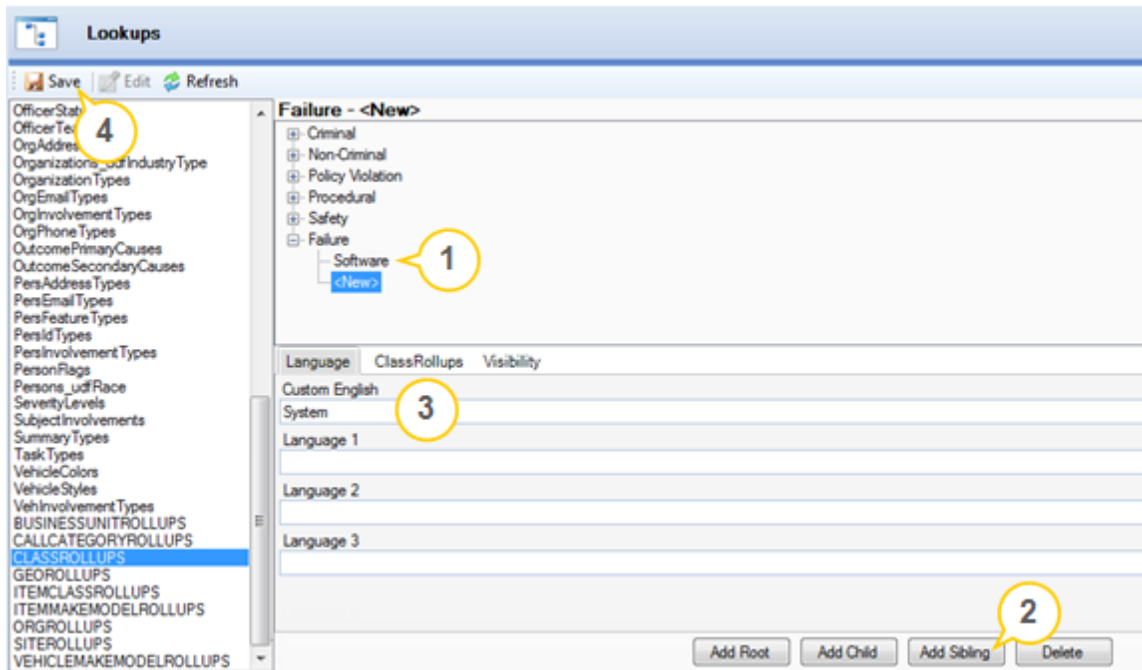


- Type the new option in the **Custom English** field (the default language for all lookup lists), or another language's corresponding text field to make the option exclusive to users of a particular language/label set.
- Click **Save**.

Specify Workgroup Visibility for a Lookup List Value


- Double-click on the correct lookup list to see the associated forms at the bottom of the screen with the Language tab open by default.
- From the lookup list, select the lookup value you would like to adjust workgroup visibility for. Some hierarchical lookups or rollups allow you to adjust visibility at the second level of the hierarchy as well as the first. In this case, expand the nodes at the root level to view further lookup options and select the option for which you wish to adjust workgroup visibility.
- Open the **Visibility** tab. Note that this tab will not appear for ORGROLLUPS, because it is not possible to adjust visibility for organizational rollups.
- By default, all lookup lists and their available options are visible to all workgroups. To permit specific workgroups to use the selected lookup option, first uncheck the **All Workgroups** box, and then click the checkboxes corresponding to the appropriate workgroups.

- Click **Save**.

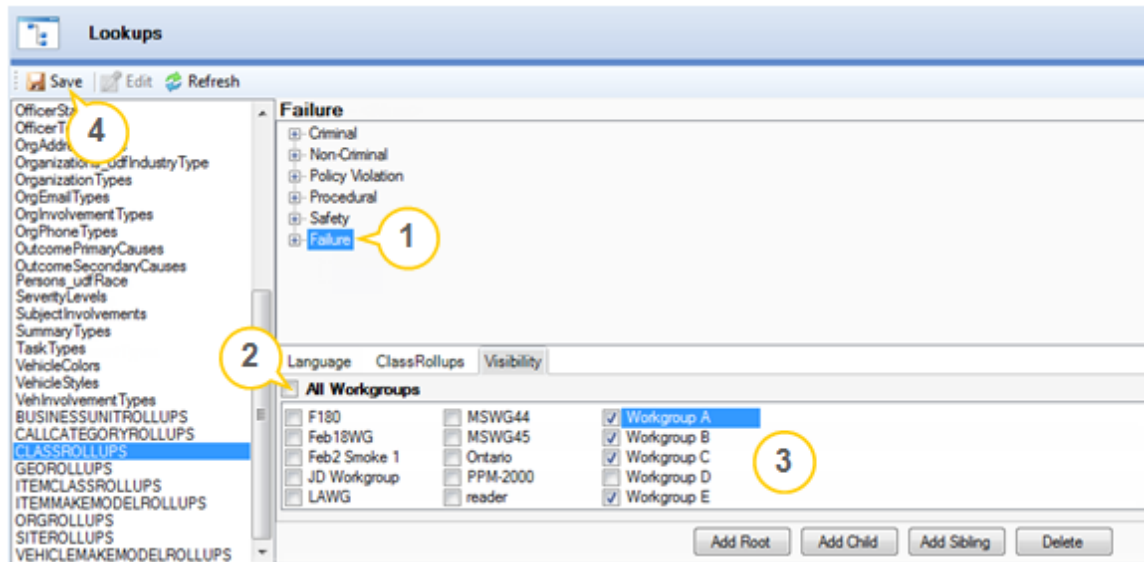

Enter Call Codes for the Call Category Lookup List

- Double-click on **CALLCATEGORYROLLUPS** at the bottom of the Lookups list and see all Call Category options on the right and the associated forms at the bottom of the screen with the Language tab open by default.
- Expand the nodes in the Call Category rollup's list of options. Each category has up to three tiers available. Select the call categories (e.g., Administrative Tasks or Activated Alarm) and sub-categories (e.g., Document Delivery or Test Alarm) for which you want to specify the code.
- Select the **Category Code** tab.
- Input the appropriate code for the selected option in the **Call Code** field. The code entered will only be saved for the particular category or sub-category selected. To enter a code for a different level of the Call Category rollup, you must select the option and input the appropriate code individually. One way to approach call codes is to build codes for sub-categories (e.g., 500A for Document Delivery and 500AK for Confidential Document Delivery) upon the codes for categories (e.g., 500 for Administrative Tasks).
- Select the appropriate **Default Priority** for each of the call categories. The priority selected will only be saved for the particular category or sub-category that you chose. To enter a priority for a different level of the Call Category rollup, you must select the option and input the correct priority marker individually.
- Click **Save**.

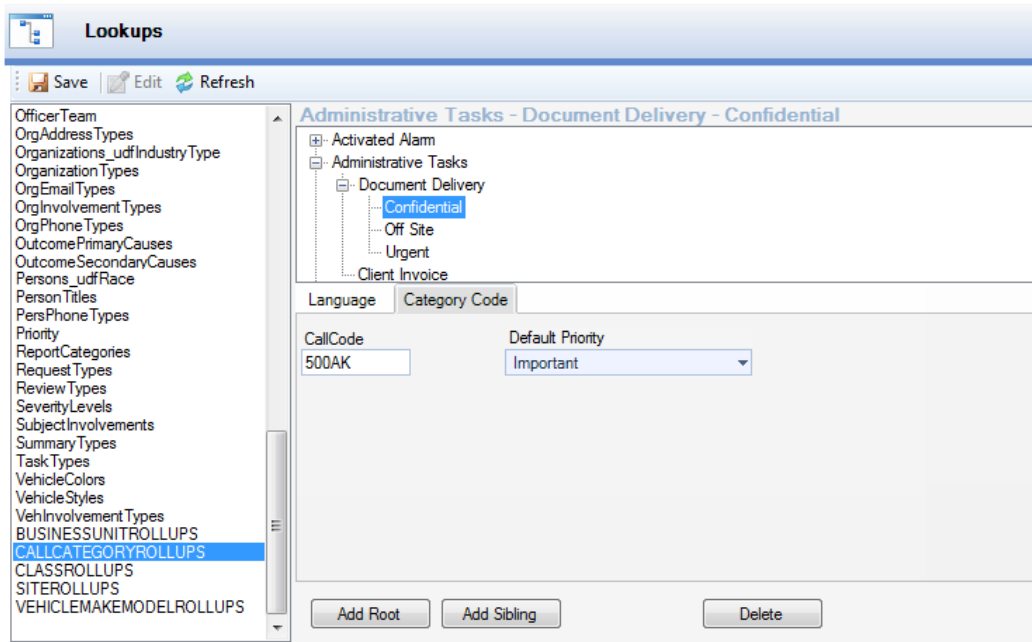

Enter Address Information for the Site Lookup List

1. Double-click on **SITEROLLUPS** at the bottom of the Lookups list and see all Site options on the right and the associated forms at the bottom of the screen with the Language tab open by default.
2. Expand the nodes in the Site rollup's list of options. Each Site has up to four tiers available. Select the Site, Building, Location or Section for which you want to specify the address.
3. Select the **SiteRollups** tab.
4. Input the appropriate address for the selected option in the **Address, Country, State/Province, City** and **Zipcode/Postal Code** fields. The address entered will only be saved for the particular Site, Building, Location or Section selected. To enter an address for a different level of the Site rollup, you must select the option and input the appropriate address individually.
5. The **Longitude** and **Latitude** fields will display the coordinates set for the Site available for any custom integrations using Integration Services.
6. If required, enter any important **Site Notes** for display in Perspective DispatchLog. Once stored for a specific site in Perspective, this text will be running on the Status bar in Perspective DispatchLog every time you select an Activity record that has its location set to this site.

The screenshot shows the Perspective DispatchLog application. The top menu bar includes 'Start', 'Schedule', and 'Options'. Below the menu is a toolbar with various icons for actions like 'Start', 'Close Activity', 'On Duty', 'Off Duty', 'Dispatch Officer', 'Dispatch Organization', 'Arrive', 'Clear', 'Activity Details', 'Officer Log', 'Attachment', 'SOP', 'Refresh', 'Filter', 'View Location', 'Status', and 'Mail'. The main window is divided into two sections: 'Activities' and 'Assigned'. The 'Activities' section contains a table with columns: Activity Number, Priority, Location, Off Site, Call Category, Reported Date, Officer Status, and Organization. The 'Assigned' section contains a table with columns: Officer Name, Location, Call Sign, Officer Status, and Team. The bottom status bar shows the time '3:27 PM' and the text 'Hazardous materials!'.

Activity Number	Priority	Location	Off Site	Call Category	Reported Date	Officer Status	Organization
ACT-2011-000142	1A	Alberta		Public Disturbance	13/07/2011	Waiting	Waiting
ACT-2011-000141	Medium	Alberta		Area Check	13/07/2011	Waiting	Waiting
ACT-2011-000151	5A	Acme...		Activated Alarm	3:17:25 PM	Waiting	Waiting

Officer Name	Location	Call Sign	Officer Status	Team
Watson-Parker,	British Columbia	PPM-002	Available	Team 2
Cage, Luke	Acme University/	PPM-001	Available	Team 2

- Click **Save**. The Site rollup address will now cross-populate for any Site/Location entered on any of the forms in the system and print on Incident and Activity reports. The particular address that appears on the forms and reports will be that of the *lowest* level in the record's Site rollup with an address entered in Perspective. For example, if a particular Site, Building and Location have been selected in a record and only the Site and Building have addresses entered in Perspective, the latter's address will appear on a form or a report.

The screenshot shows the Lookups application. The left sidebar lists various lookup categories, with 'SITEROLLUPS' selected. The main window displays the 'Acme University - Administration Building' hierarchy. The 'SiteRollups' tab is selected, showing fields for Longitude, Latitude, Country, State/Province, City, Address1, Address2, Zipcode/Postal Code, and Site Notes. The 'Site Notes' field contains the text 'Hazardous Materials!'.

Longitude	Latitude	Country	State/Province	City	Address1	Address2	Zipcode/Postal Code	Site Notes
0.00	0.00	Canada	Alberta	Edmonton	1112 University Drive	Administration Building	T1A 2B3	Hazardous Materials!

Activity Statuses and Officer Statuses (DispatchLog Only)

*Note: This section refers to **DispatchLog** settings. For more information on the settings for **Dispatch**, visit the [Resolver Support](#) site.*

The **Activity Statuses** Lookup, used in Activity and DispatchLog tasks, warrants special mention, as it behaves differently than its name may suggest. In effect, these statuses apply to both activities and officers, as in DispatchLog an Activity's status is usually determined by the status of the Officer(s) currently assigned to it.

The Relationship Between Activity Statuses and Officer Statuses

Adding new values to the Activity Statuses Lookup list doesn't strictly add statuses to activities as the name may suggest; these statuses are also tied directly to Officer Statuses.

Refer to **System values** below for a list of Activity Statuses already in the Perspective system.

Note: System Values cannot be deleted, though they can be renamed on a per-language basis.

Additional values added to this Lookup, due to the nature of how Activity and Officer Statuses relate, become new Officer Statuses. For example, if the custom value "On Lunch Break" is added, this status applies only to Officers and not Activities.

System Values

The following Activity Statuses are considered System values (i.e., they cannot be deleted):

- **Available:** Applies to Officers and denotes the associated Officer is available for assignment.
- **Busy:** Applies to Officers and denotes the associated Officer is on duty, but currently "busy" and cannot be assigned at this time.
- **Cleared:** Applies to Activities and denotes the assigned Officer(s) have been cleared and the associated Activity may be marked as Closed.
- **Closed - No Report:** Applies to Activities and denotes the associated Activity is closed with no report required.
- **Closed - Report Completed:** Applies to Activities and denotes the associated Activity was open, then had a report completed, causing it to close.

- **On Hold:** Applies to both Officers and Activities; denotes the assigned Officer considers the Activity "on hold" while the Officer completes his or her current assignment. This is considered a "temporary" status.
- **On Route:** Applies to both Officers and Activities; denotes the associated Officer is on route to the site of an assigned Activity.
- **On Scene:** Applies to both Officers and Activities; denotes the associated Officer is at the site of an assigned Activity.
- **Open - Report Required:** Applies to Activities and denotes the associated Activity requires a report to be completed. The Activity status can only be move to Closed either once a report is complete (i.e., **Closed – Report Completed**) or a report is no longer required (i.e., **Closed – No Report**).


*Note: To note an Activity's state further than Open or Closed, use **Activity Disposition** Lookup values.*

- **Out of Service:** Applies to Officers and denotes the associated Officer is considered "out of service" an unavailable in the field for any assignment.
- **Suspended:** Applies to both Officers and Activities; denotes the assigned Officer was either On Route or On Scene and was reassigned before the former Activity was cleared. The response is considered "suspended" until the officer is assigned; once that happens, the suspended response is then cleared. This is considered a "temporary" status.
- **Waiting:** Applies to Activities and denotes a new Activity awaiting an Officer assignment.


Flags


Add a New Incident or Person Flag

1. Select **Lookups** in the Navigation pane.
2. In the Lookups list, double-click **IncidentFlags** if you wish to add a flag to the Incident form, or **PersonFlags** if you wish to add a flag to the Person form.
3. Click the **Add New** button at the bottom of the screen.
4. Type the name of the new flag in the **Base Language** field.
5. Click **Save**.
6. Click the **Refresh** button.

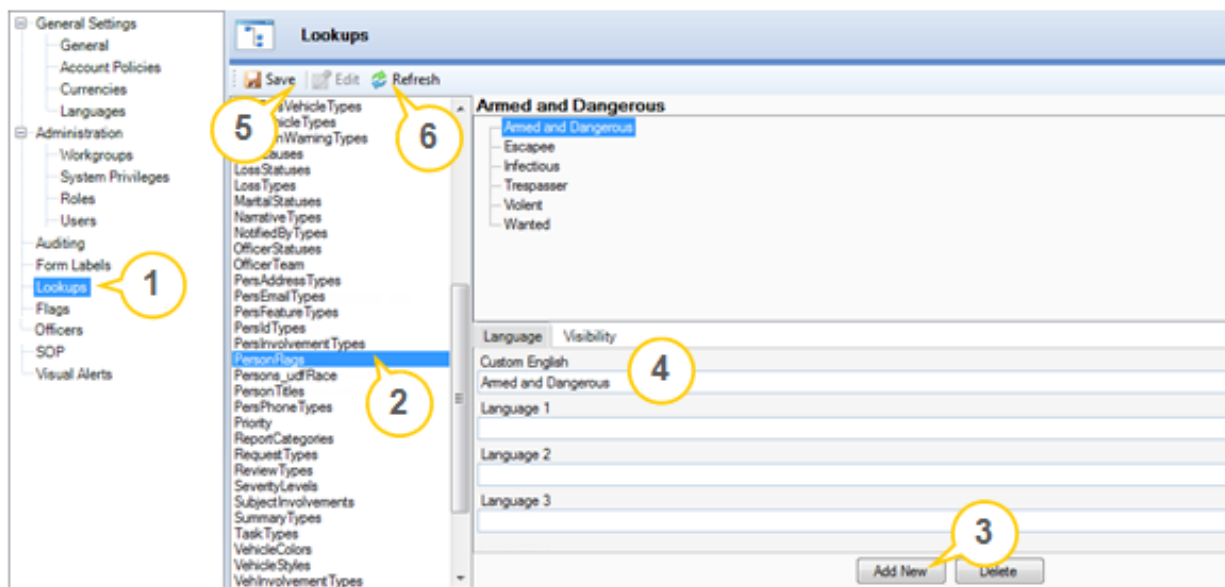

7. Select **Flags** in the Navigation pane.
8. Specify the type of flags intended for editing by selecting either **Incidents** or **Persons** from the **View Flags For** lookup list.
9. Click **Add**.
10. In the new flag form on the right, select the flag name you created earlier in the Lookups section on the **Flag Description** lookup list.
11. Enter a unique one-character designation for the flag in the **Flag Code** field.



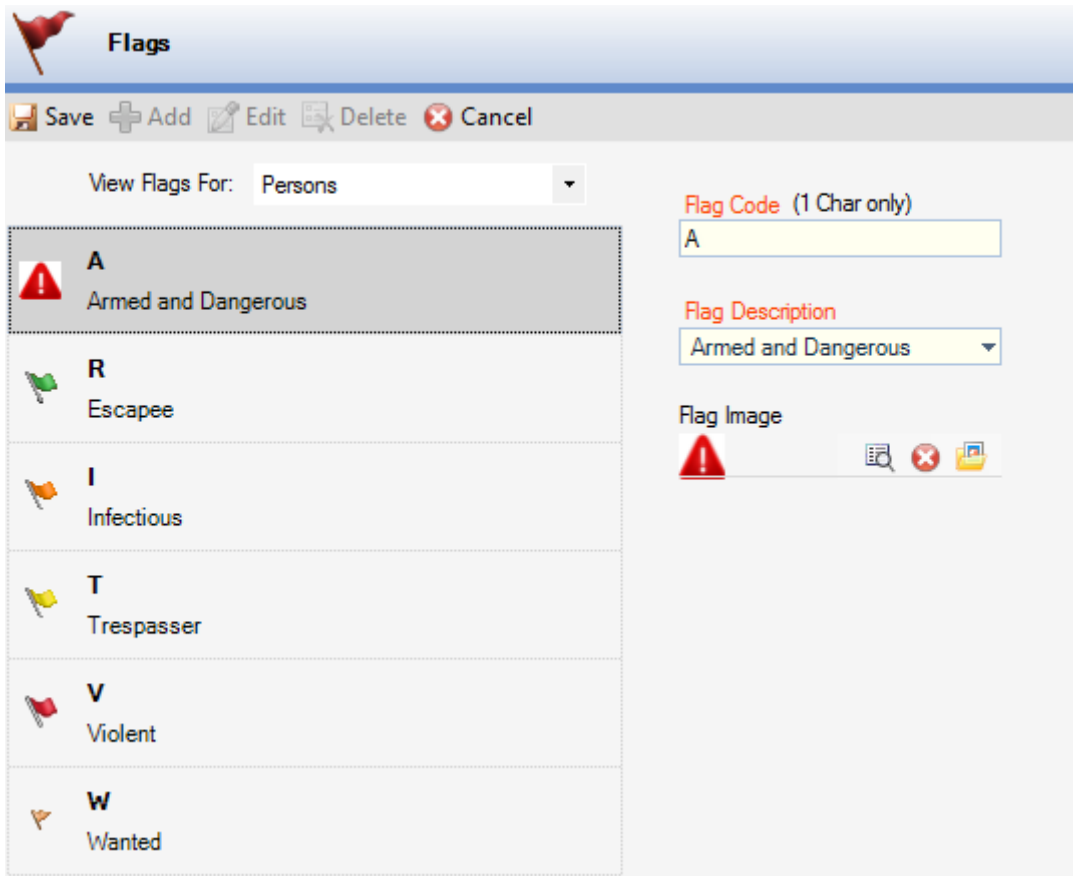



12. To add an image to the new flag, click the **Add** icon  in the **Flag Image** field, select an image from the pop-up browser and click Open.
13. Click **Save**.
14. To edit an existing flag, click **Edit** and proceed as described above. To delete a flag, go to the Lookups section, the IncidentFlags or the PersonFlags lookup, select the relevant flag's node and click **Delete**.



Flags





Save Add Edit Delete Cancel

View Flags For: Persons

	A Armed and Dangerous
	R Escapee
	I Infectious
	T Trespasser
	V Violent
	W Wanted

Flag Code (1 Char only)
A

Flag Description
Armed and Dangerous

Flag Image
   

Standard Operating Procedures

Create a New Standard Operating Procedure Rule for an Activity

Using the Standard Operating Procedures (SOP) component of Administration, you can create a new SOP rule restricting it to a specific call category, site specifications and/or activity status. The created SOP rule will subsequently feature in Activity records that correspond to the settings specified in both Perspective's Activity data forms and the SOP component in Perspective DispatchLog.

In order to complete this operation, select **SOP** on the Navigation pane and follow the steps below:

1. Click **Add**. A blank SOP form will open with the **General** tab, the **Description** sub-tab open.
2. Start with specifying the official **SOP Name** in the required field.
3. Add a brief **Procedure Description** in the textbox below.

The screenshot displays the 'Standard Operating Procedures' interface. On the left, a navigation pane lists categories: 'Bomb Threat' (Procedures for response to bomb), 'Fire Alarm Response', 'RIOT Disturbance' (What to do for a RIOT), and 'Security Activity: Facility Check' (The routine facility check is perform). The main content area is titled 'Standard Operating Procedures' and includes a toolbar with 'Save', 'Add', 'Edit', 'Delete', and 'Cancel'. Below the toolbar, the 'General' tab is selected, showing sub-tabs for 'Description', 'Checklist', 'Attachments', 'Links', and 'Notifications'. The 'Description' sub-tab is active, displaying 'SOP Details' with a text box for 'SOP Name' containing 'Security Activity: Facility Check' and a larger text box for 'Procedure Description' containing 'The routine facility check is performed at the end of every working day, at 18:00, to confirm the integrity of the system settings of computers on site.'

4. To start defining the activity parameters that would trigger the SOP, open the **Activity** tab.
5. Click **Add New**.
6. In the new record window, specify the restrictive parameters for the activities that would trigger the SOP by entering the activity type's **Code** and/or the **Levels**. Make the parameters as specific as necessary (e.g., Security Activity, Security Activity/Verification\Check, etc.).
7. Check the **Active** box to restrict the SOP to active activities only.

8. Restrict the location of the SOP-related activities by selecting their common **Site**, **Building**, **Location** and **Section**. Make the parameters as specific as necessary (e.g., Acme University, Acme University/Administration Building, etc.).
9. Check the **Off Site** box to implement the SOP to the off-site activities only.
10. Click **OK** to save the parameters for immediate activation of the SOP.
11. If required, add relevant **SOP Checklist(s)**, **Attachment(s)**, **Link(s)**, and set up **Notification(s)**.

Edit Record

OK Cancel

Code: 911C-4

Level 1: Security Activity

Level 2: Verification/Check

Level 3: Facility Check

Site: ☒ Active

Site: Acme University

Building: Administration Building

Location:

Section:

☐ Off Site

12. Add as many activity parameters that match the SOP requirements as necessary, and click **Save**. The next time an activity with the specified parameters is created the system will automatically activate the SOP option in Perspective and Perspective DispatchLog.

Save Add Edit Delete Cancel

General Activity


Add New Edit Remove

Total Activities: 2


SOP Name	Call Category	Site Rollup	Is Active	Is OffSite
Security Activity:	Security Activity/	Acme University/	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Security Activity:	Suspicious Activit	Alberta/Edmonton	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Add a Checklist for the SOP

1. Open the **General** tab, the **Checklist** sub-tab.
2. To specify the first checklist item, click **Add New**.
3. Enter the text of the initial recommended procedure, and click **OK**.

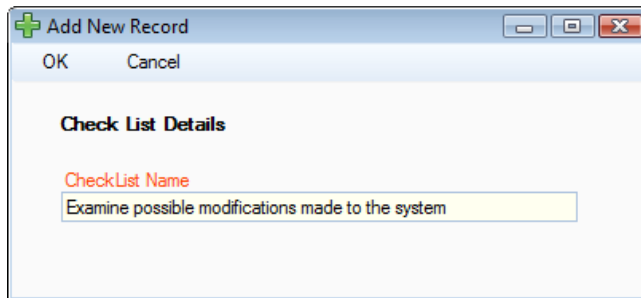


4. Add as many procedures that constitute your required SOP as necessary.
5. To re-arrange the position of items in the checklist, select the item of interest and click **Move Up** and **Move Down**, as required.
6. Click **Save**. The next time an activity with the [specified parameters](#) is created the system will automatically activate the SOP option in Perspective and Perspective DispatchLog and display the interactive checklist. In the Activity record, you will be able to check the completed actions.

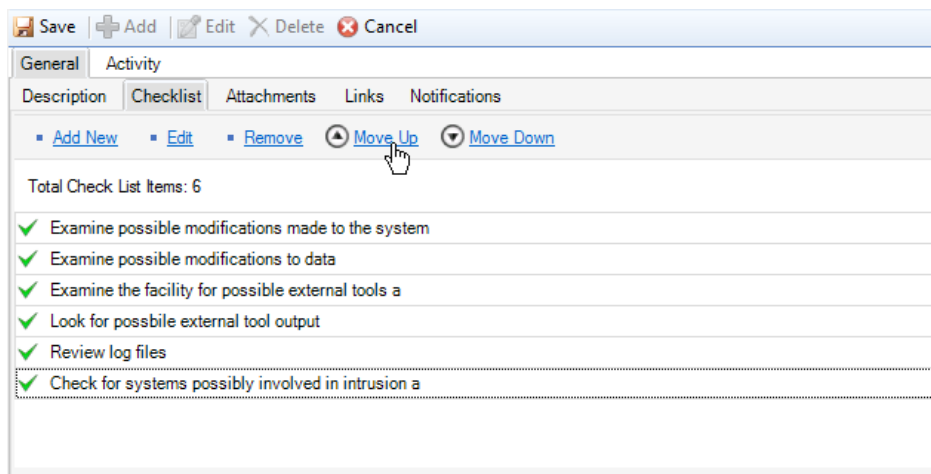


Attach a Relevant SOP File

1. Open the **General** tab, the **Attachments** sub-tab.
2. To attach a file related to the SOP, click **Add New**. A pop-up window will open.
3. Drag-and-drop the file you wish to attach into the window. Alternatively, click **Browse** to locate and select the file you wish to attach.
4. The **Attachment Title** field will automatically populate with the name of the attached file. If necessary, modify the name.

5. From the **Attachment Type** lookup list, select the appropriate designator for the attachment (e.g., Document, Picture, Video).
6. Give an overview of the attachment in the **Description** text box.
7. Click **OK** to upload the attachment. Once the upload is complete, click OK again to return to the record.

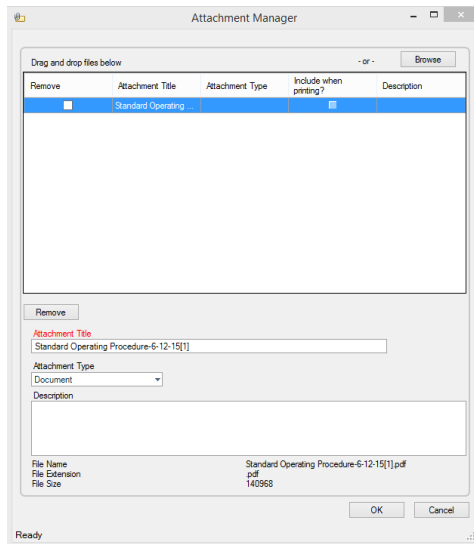


8. Add as many attachments as necessary.
9. Click **Save**. The next time an activity with the **specified parameters** is created the system will automatically activate the SOP option in Perspective and Perspective DispatchLog and display the list of viewable attachments.
10. To view an attachment that has been added to the list, select it in the grid and click **View**. Then, click **Open** to see it, or **Save As** to save it on your computer.

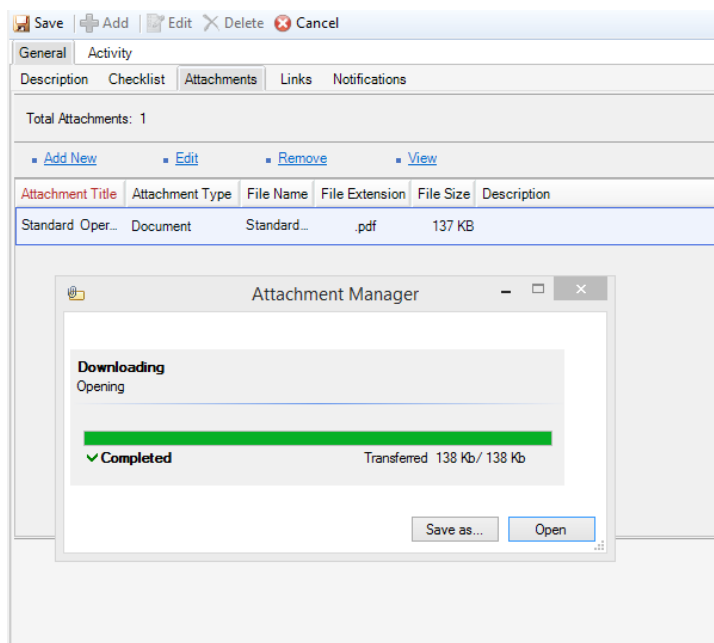

Add a Relevant SOP Link

1. Open the **General** tab, the **Links** sub-tab.
2. To add a relevant SOP link to a file on your organization's commonly accessible local drive or an external Web URL, click **Add New**. A pop-up window will open.
3. In the Title field, enter a descriptor for the link you are creating.
4. If you are linking a local file, click the **Browse** icon, find the corresponding file and click **Open** to confirm the operation. If the link is a Web URL, paste the link into the **Link** field.
5. Click **OK** to add the link to the list.

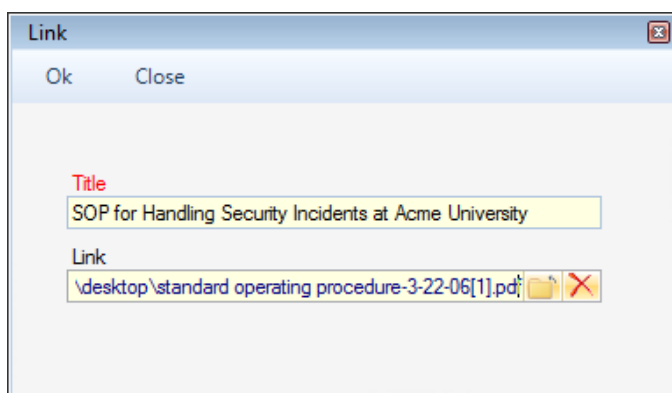

6. Click **Save**. The next time an activity with the **specified parameters** is created the system will automatically activate the SOP option in Perspective and Perspective DispatchLog and display the links for reference.
7. To view the created link, select the link in the grid and click **View**. If the link is still valid, the file or URL will open.

Description	Checklist	Attachments	Links	Notifications
Add New Edit Remove View				
Total Links: 2				
SOP for Handling Security Incidents at Acme University			C:\Users\svetlana.remnyakova\Desktop\STANDARD OPERATING PROCEDURE\	
MIR3 inEnterprise Login Page			https://inenterprise.mir3.com/isp/security/showlogin.jsp	

Set Up Individual and Mass Notifications for the SOP

Using the Notification feature of Administration, you may set up multiple individual, as well as mass notifications that will be sent out once an activity with the previously **specified parameters** is created. The mass notifications are being sent in conjunction with the third-party notification tool, the MIR3SM inEnterpriseTM.

1. Open the **General** tab, the **Links** sub-tab.
2. Under **To** and **Cc** fields, specify the recipients' direct and the carbon copy email addresses respectively for the delivery of the individual notifications. You may either type the addresses in, or click the relevant buttons and select the user(s) you wish to email the notification to from the list. Note that only the users with specified Primary Email Address will be available for the list selection.
3. Enter the **Subject** of the notification.
4. In the **Message** textbox, enter the SOP notification message.
5. If mass notification feature is enabled in your system and a mass notification is required for the SOP, select the **Notification Type** from the lookup list below. For details about setting up the available Notification Type options, refer to the *Perspective Installation Guide*.
6. Click **Save**. The next time the appropriate activity is created the system will automatically activate the SOP option in Perspective and Perspective DispatchLog and provide a form to send out the relevant notifications. In the Activity record, you will also be able to read the notifications that have previously been sent.

Save
 Add
 Edit
 Delete
 Cancel

General

Activity

Description

Checklist

Attachments

Links

Notifications

Email Notification

To ...

charlene.czifusz@ppm.com;michelle.smith@ppm2000.com

Cc ...

svetlana.remnyakova@ppm2000.com

Subject:

SOP for Security Activity: Facility Check

Message:

Site: Acme University, Administration Building

Activity: Security Activity: Facility Check

The routine facility check must be performed at the end of every working day, at 18:00, to confirm the integrity of the system settings of computers on site.

Send Mass Notification

Notification Type

Training

Visual Alerts (DispatchLog Only)

*Note: This section refers to **DispatchLog** settings. For more information on the settings for **Dispatch**, visit the [Resolver Support](#) site.*

Using the Visual Alerts section in the Administration module of Perspective, you can easily manipulate the display of specific types of information in Perspective DispatchLog™. For instance, you may highlight important or urgent data to easily prioritize information for the dispatcher.

Creating visualization settings contained in the Visual Alerts component of Administration you can customize the visual representation (i.e., set background color, text font and color, flashing, or time bars) of the following types of data:

- **Officer Team:** Fields with names of specific Officer Teams (e.g., Front Entrance, Lobby).
- **Officer Status:** Fields with specific Officers' Statuses (e.g., On Route, On Scene).
- **Organization Status:** Fields with specific Organizations' Statuses (e.g., Waiting, On Route, Cleared).
- **Priority:** Fields with specific activity Priority values (e.g., High, Medium, Low, Caution).
- **Location:** Fields with specific activity location (i.e., Site, Building, Location, Section) values (e.g., Site C/Building 1, Alberta/Edmonton/Downtown)

Moreover, using the **Regulated Time to Act** feature, you may set amounts of time to act for officers that have been assigned a specific officer status, have been placed to a specific location and/or dispatched for an activity with a specific priority. With an equivalent **Officer Alerts** feature, you may also specify the set amounts of time for officers' Status changes.

Define Visual Representation for Certain Data Types

In order to set up visual alerts for the future use in Perspective DispatchLog, click **Visual Alerts** on the Navigation pane. Using the first five tabs of the component, you may define the visual representation (i.e., the font and the background color) for the fields that differentiate various **Officer Teams, Officer Statuses, Organization Statuses, Priorities** and **Locations**.

Activities										
Activity Number	Priority	Officer Status	RTA Start Da	Time Res	Call Category	Location	Off Site	Reported Date/	Organization Status	Description
ACT1-2011-000105	Low	Waiting			Security...	Site B/Building 1		2:47 PM		Officer working at CapE
ACT1-2011-000101	Low	Waiting			General...	Site C/Building 1		2:10 PM		Assist SPD with arrest of
ACT1-2011-08-00013	Extreme	Waiting			Dangerous Condi	British Columbia		31/08/2011		
ACT1-2011-08-00012	Minimal	Waiting			Alarm	British Columbia		31/08/2011	On Route	
ACT1-2011-08-00010	Important	Waiting			Dangerous Condi	British Columbia		31/08/2011		
ACT1-2011-000103	Minimal	On Scene			Security...	Site D/Building 1		31/08/2011		Officer attending Toront
ACT1-2011-000005	High	Waiting			Bomb Threat			31/08/2011		
ACT-2011-000022	High	On Scene			Bomb Threat			15/08/2011	On Route	
ACT-2011-000020	High	On Route			Alarm/Panic	Site A		12/08/2011	On Route	

1. Open the appropriate tab (e.g., Officer Team, Priority, Location).
2. Click **Add New**.
3. A blank alert window will pop up. In the lookup, select the descriptor(s) of the category for which you wish to edit the format (e.g., Officer Team, Priority, Site/Building/Location/Section). For Location, check the Off Site box to indicate that the location is off-site.
4. Using the color lookups, select the **Background** and the **Text Colors** for the field of the selected category.
5. Check the **Bold**, **Italic**, **Underline** and/or **Strikethrough** boxes to add further font effects.
6. Preview the resulting field view below and click **OK**, if the result corresponds to your expectations.

Add New Record

OK Cancel

Site
Acme University

Building
Administration Building

Location
[Empty]

Section
[Empty]

☒ Off Site

Format

Background Color [Light Blue]

Text Color [Black]

☒ Bold

☐ Italic


☐ Underline

☒ Strikethrough

Preview

Sample

7. Add as many visual specifications to as many of the available categories as necessary. Click **Save**.

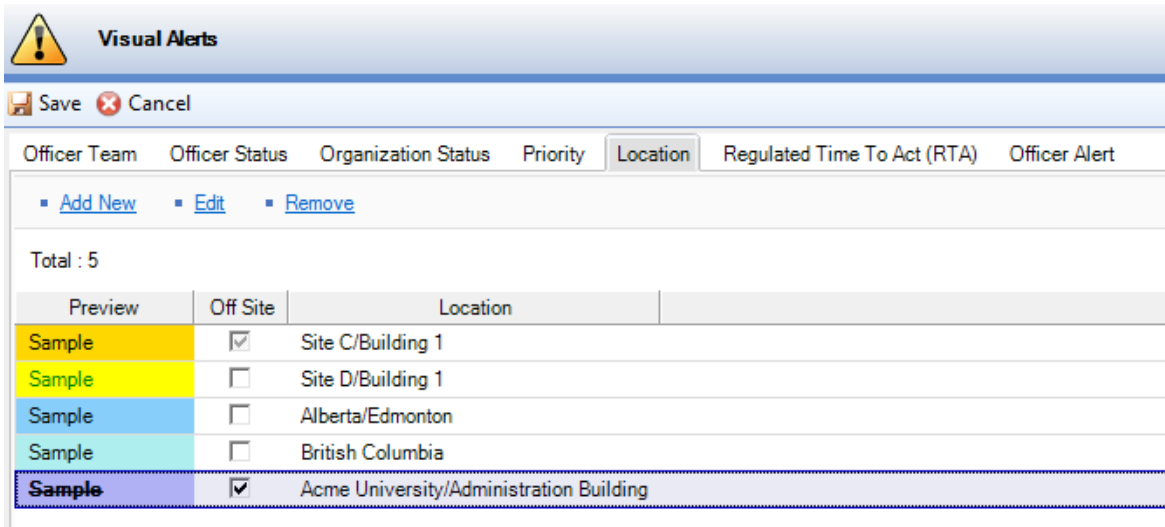

Visual Alerts

Save Cancel

Officer Team Officer Status Organization Status Priority **Location** Regulated Time To Act (RTA) Officer Alert

[Add New](#)
[Edit](#)
[Remove](#)

Total : 5

Preview	Off Site	Location
Sample	<input checked="" type="checkbox"/>	Site C/Building 1
Sample	<input type="checkbox"/>	Site D/Building 1
Sample	<input type="checkbox"/>	Alberta/Edmonton
Sample	<input type="checkbox"/>	British Columbia
Sample	<input checked="" type="checkbox"/>	Acme University/Administration Building

Create a New Regulated Time to Act (RTA) Alert

To create a new RTA alert for a dispatched activity in Perspective DispatchLog, open the **Regulated Time to Act (RTA)** tab and define the settings of the alert (Officer Status, Location and activity's Priority). Once activated in DispatchLog, the settings defined for the alert will cause the RTA timer to start counting the time the dispatcher is left to check and modify the status of the dispatched officer.

For example, you may set a specific regulated time to act (e.g., 10 minutes) for a "High Priority" activity for which an officer has been dispatched with the status "On Scene" who has now reached the location "Acme University/Administration Building". Then, as soon as the officer under all these conditions is dispatched for a matching activity in DispatchLog, the dispatcher will see the timer on their screen counting the time during which the officer is supposed to respond to the current combination of conditions.

If, for some reason, the officer failed to respond about their status change during the allotted period of time, the timer will start counting the time the officer spends in the set conditions after the RTA expiry, advancing in negative values. The display of the RTA time bar will change to flashing red to alert the dispatcher on the absence of an adequate response to the activity.

*Note: The only obligatory condition for the timer to set on is the allocation of an RTA alert to a particular **Officer Status**. The officer's location and priority of the activity the officer is involved can be optionally added to restrict the set of activities to the particular combination of settings.*

Activities										
Activity Number	Priority	Officer Status	RTA Alert	Time Remaining	Call Category	Location	Off Site	Reported Date/	Organization Status	Description
ACT1-2011-00010:	Low	Waiting			General...	Site C/Building 1		01/09/2011		with arrest of...
ACT1-2011-08-0001	Extreme	Waiting			Dangerous Condit	British Columbia		31/08/2011		
ACT1-2011-08-0001	Minimal	On Scene			Alarm	British Columbia		31/08/2011	On Route	
ACT1-2011-08-0001	Important	On Route	57 %	00:00:30	Emergency Call/91	Alberta		31/08/2011		
ACT1-2011-08-0001	Minimal	Waiting			Escort	Alberta		31/08/2011		
ACT1-2011-00010:	Minimal	On Scene			Security...	Site D/Building 1		31/08/2011		ending Toronto l
ACT-2011-000020	High	On Route			Alarm/Panic	Site A		12/08/2011	On Route	

RTA Alert	Time Remaining
41 %	00:00:17
21 %	00:00:02
0 %	- 00:00:17

To create a new RTA alert, follow the steps below:

1. Click **Add New**. A new entity form will pop up.
2. Specify the **Site**, **Building**, **Location** and/or **Section** for which you are setting the alert, selecting as many restrictive location options as necessary from the lookups. Check the **Off Site** box, if necessary.
3. Set the **Officer Status** that is intended to initiate the timer of the alert.
4. Make the timer respond to a particular activity priority by specifying the **Priority** setting for the alert.
5. Define the amount of time during which the dispatcher is supposed to respond to the activity with the set combination of conditions under the **Time Allowed** fields.
6. Click **OK**. The RTA table will populate with the new activity alert.

+

Add New Record

OK Cancel

RTA Details

Site

Acme University

Building

Administration Building

Location

East Wing

Section

Officer Status

On Scene

Priority

High

Off Site

☐


Time Allowed (less than 24hrs)

0 hr 10 min 0 s

⚠

Leave Site Rollup blank to apply alert to any site selection

7. To edit an RTA alert, select it in the grid and click **Edit**. To delete an alert, select it in the grid and click **Remove**.

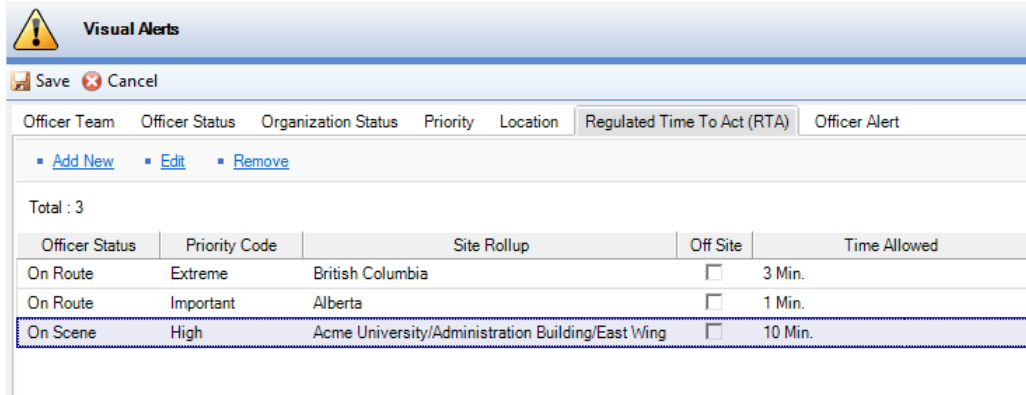

The Visual Alerts dialog box features a title bar with a warning icon and the text "Visual Alerts". Below the title bar are "Save" and "Cancel" buttons. A tabbed interface at the top includes "Officer Team", "Officer Status", "Organization Status", "Priority", "Location", "Regulated Time To Act (RTA)", and "Officer Alert". The "Officer Alert" tab is active, displaying "Add New", "Edit", and "Remove" links. A summary line indicates "Total : 3". Below this is a table with five columns: "Officer Status", "Priority Code", "Site Rollup", "Off Site", and "Time Allowed".

Officer Status	Priority Code	Site Rollup	Off Site	Time Allowed
On Route	Extreme	British Columbia	<input type="checkbox"/>	3 Min.
On Route	Important	Alberta	<input type="checkbox"/>	1 Min.
On Scene	High	Acme University/Administration Building/East Wing	<input type="checkbox"/>	10 Min.

Create a New Officer Alert

To create a new time alert for an officer in Perspective DispatchLog, open the **Officer Alert** tab and define the settings of the alert (Officer Status and Location). Once activated in DispatchLog, the settings defined for the officer alert will cause the available or assigned officer's RTA timer to start counting the time the officer is left to act in the set status and/or at the set location.

For example, you may set a specific regulated time to act (e.g., 20 minutes) for an officer whose status has switched to "On Scene" and who has now reached the location "British Columbia". Then, as soon as these conditions activate in DispatchLog for this officer, the dispatcher will see the timer on their screen that will count the time for the officer to respond to the current combination of conditions before their status must be modified.

If, for some reason, the officer failed to respond about their status change during the allotted period of time, the timer will start counting the time the officer spends in the set conditions after the time alert expiry, advancing in negative values. The display of the time bar will change to flashing red to alert the dispatcher on the absence of an adequate response from the officer.

As with the RTA alerts for activities, the only obligatory condition for the officer's timer to set on is the allocation of a time alert to a particular **Officer Status**. The officer's location can be optionally added to restrict the population of officers to the particular location.

Assigned							
Team	Call Sign	Officer/Organization Name	Status	ActivityID	Location	Time Elapsed	
P3	133A	Dargie, Nancy	On Route	ACT1-2011-000417		5d 23h	
	PPM-002	Watson-Parker, Mary-Jan	On Route	ACT1-2011-000416	Acme University/Administration	2d 23h	
P2	130B	Sieben, Jeff	On Scene	ACT1-2011-000414		00:00:09	

Time Elapsed

00:00:04

00:09:19

To create a new Officer alert, follow the steps below:

1. Click **Add New**. A new entity form will pop up.
2. Specify the **Site**, **Building**, **Location** and/or **Section** for which you are setting the alert, selecting as many restrictive location options as necessary from the lookups. Check the **Off Site** box, if necessary.
3. Set the **Officer Status** that is intended to initiate the timer of the alert.
4. Define the amount of time during which the officer is supposed to respond to the activity with the set combination of conditions under the **Time Allowed** fields.
5. Click **OK**. The Officer Alert table will populate with the new officer alert.

Add New Record
OK
Cancel

RTA Details

Site
Acme University
Officer Status
Patrol


Building
Administration Building



Location
Off Site
☐

Section
Time Allowed (less than 24hrs)
0 hr 20 min 0 s

⚠ Leave Site Rollup blank to apply alert to any site selection

6. To edit an officer alert, select it in the grid and click **Edit**. To delete an alert, select it in the grid and click **Remove**.


Visual Alerts

 Save
  Cancel

Officer Team Officer Status Organization Status Priority Location Regulated Time To Act (RTA) **Officer Alert**

▪ [Add New](#) ▪ [Edit](#) ▪ [Remove](#)

Total : 3

Officer Status	Site Rollup	Off Site	Time Allowed
P-STP	Alberta	<input type="checkbox"/>	20 Secs.
On Scene	British Columbia	<input type="checkbox"/>	15 Min.
Patrol	Acme University/Administration Building	<input checked="" type="checkbox"/>	20 Min.


Language

The Language section allows you to set Perspective's operating language and, if desired, custom help files.

Languages

The Languages section—not to be confused with "Language" above it—allows you to set language names and associated help paths.

Note that Perspective comes pre-installed with a default language (**System English**) and associated help files. Only set additional languages if you need either new English terminology or non-English languages.

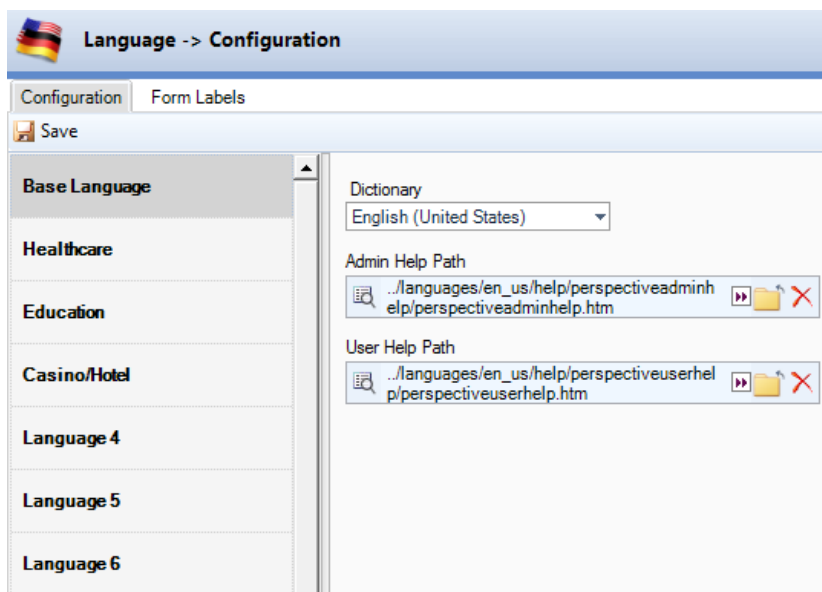

Set Languages and Help File Paths

1. Select a dictionary to use in the **Dictionary** drop down box.
2. In the **Admin Help Path** and **User Help Path** fields, type the path for the language's associated help files, or click the **Browse** (...) button and browse to the appropriate file on your computer or network.
3. Click **Save**.

Form Labels

The Form Labels section provides lists of text fields that display throughout the Perspective interface, and are tied to the selected Perspective language. In order to set new or modify existing labels, open the **Form Labels** component, under **Language**, in the Navigation pane. On the right pane, a list of text fields will be displayed that specifies the selected entity. The first two columns of the list provide the string **ID** and the default **System English** label for each text field.

Create a Single Custom Label Set for All Users

1. Use the **Language to Search** section to bring up the field names you wish to change.
2. Enter your custom field label in the **Base Language** text field. The Custom English column will automatically populate with the new field label. As soon as a new label name is added to the Custom English column, Perspective defaults to this name rather than the original System English label. If you would prefer to have different users see different field labels, refer to the [Create a Custom Label Set for Each User Group in Your Organization](#) chapter for more information.
3. Continue assigning custom field labels.
4. Click **Save**. The next time any user without an assigned custom language logs on, they will see the new Custom English labels rather than the original System English labels.

Create a Custom Label Set for Each User Group in Your Organization

1. Use the **Language to Search** section to bring up the field names you wish to change.
2. Enter your custom field label in the text field that corresponds to the customized language that you created previously.
3. Continue re-labelling fields for your customized language. The column for your customized language will automatically populate with the new field labels you create.
4. Click **Save**. If you have already assigned your customized language to some users, your custom field labels will appear the next time they log on.

Create Custom Report Footers

Custom report footer labels are normally hidden from view, as the labels themselves are blank, and therefore not searchable.

Report footers are added to the end of a report and are listed in Perspective as **Custom Footer 1** and **Custom Footer 2**. **Page Footer 1** is added to the bottom of each report page.

- Under the **Language to Search** section, drill-down to **Reports**, then **Labels**. The third drill-down contains the custom report footers.

- **Custom Footer 1** appears in bold at the end of a report.
- **Custom Footer 2** appears as a sub-heading to Custom Footer 1. Custom Footer 2 is not bolded.
- **Page Footer 1** appears in small text at the bottom left of every page.

- Enter custom footer text in the language label sets required.

The following sample report shows custom footers in effect:

This is Custom Footer 1.
This is Custom Footer 2.



Incident Record Created By PPM2000, 9/18/2011 4:18 PM GMT

Last Modified By FKennedy, 12/14/2011 7:14 PM GMT

Owner Workgroup:

Doons

Access Level:

Level 1 (Lowest)

Local Print Date/Time:

2/5/2013 2:13 PM

Page 1 of 1

This is Page Footer 1.

Gateway Administration

Once a member of your organization has submitted an electronic report to the Gateway or imported a file into the Gateway, the Gateway Administrator and/or Gateway Approver are responsible for the assessment of the report.

Note: Incident, Item, Person, Organization and Vehicle reports can be imported through the Import Manager.

Before any of the steps in this reporting process take place, the Perspective Administrator must first permit workgroups to import files into the Gateway and/or grant Perspective e-Reporting and/or Web Portal access to workgroups, as well as authorize Gateway Administrators and Gateway Approvers to perform their associated Gateway functions.

Note: For more information on these roles and what they entail, consult the Perspective User's Guide or Perspective's online User Help.

In this guide, the term *e-Incident* refers to the electronic reports submitted both via Perspective e-Reporting (the so-called *e-Reports*), and via the rest of the possible Perspective's electronic submission methods, such as Perspective's Web Portal.

Specify Gateway File Import and/or e-Reporting Access Options for a Workgroup

In order to enable smooth data communication between Perspective's electronic submission devices and Perspective Gateway, the Perspective's Administrator must permit workgroups to import files into the Gateway and/or grant e-Reporting and/or Web Portal access to appropriate workgroups.



The workgroups that will be working with Perspective e-Reporting should have limited visibility to GeoRollups (see the ["Specify workgroup visibility for a lookup list"](#) chapter for details). Large lists may cause e-Reporting to hang or crash.

1. Select **Workgroups** in the Navigation pane, choose the correct workgroup from the list, and click **Edit**.
2. Check the **Enable Imports to this Workgroup** checkbox. The Gateway opens by default.
3. Under the **Gateway** tab, start specifying Gateway file import options for the workgroup by providing the workgroup with a unique **Import Key**. This import key will act as an added security measure, restricting imports to the authorized workgroup only.

4. In the **Incident Settings** section below, specify a unique **Incident Prefix** for all of the workgroup's e-Incidents. For example, *WEB* for e-Reports and *EINC* for some other type of electronic reports (e.g., reports from Perspective Web Portal).
5. Choose an **Incident Identifier Format** from the lookup list:
 - **CCYY-MM-####**: This format identifies the e-Incident by the calendar year (CCYY) and month (MM) that the report was submitted to the Gateway, followed by a five digit sequential number that re-sets at the beginning of each month. For example, 2011-03-00123 identifies the 123rd e-Incident submitted to the Gateway in March 2011.
 - **CCYY-#####**: This format identifies the e-Incident by the calendar year (CCYY) that the report was submitted to the Gateway, followed by a six digit sequential number that re-sets at the beginning of each year. For example, 2011-004567 identifies the 4567th e-Incident submitted to the Gateway in 2011.
 - **#####**: This is known as *flat file format*. There is no year or month preceding the number. The first e-Incident submitted to the Gateway will be identified by the number 0000000001, and this sequential numbering will continue indefinitely with no re-set.
6. Specify an **Accepted Retention Period** and a **Deleted Retention Period** for how long imported Item, Person, Organization or Vehicle reports should remain in the Gateway after they have been accepted or deleted by the Gateway Approver or Gateway Administrator.
7. Indicate how long imported e-Incidents should remain in the Gateway after they have been made available or deleted by the Gateway Administrator or Gateway Approver under **Available Retention Period** and **Deleted Retention Period**.
8. Under **Added Retention Period**, specify how long imported Item, Person, Organization or Vehicle reports should remain in the Gateway after they have been added to the main Perspective database by authorized users.
9. In the **General Record Settings** section, check the **Auto Accept** box to automatically accept every Item, Person, Organization or Vehicle report that the workgroup imports, making them available for authorized users to add to the Perspective database. If this box is not checked, the workgroup's imported reports will undergo the normal Gateway review process by a designated Gateway Administrator or Gateway Approver prior to being made available or being deleted.



This box does not apply to imported Incident reports. Incident reports must always undergo Gateway assessment and review before being accepted into the Perspective database.


10. Click **Save**.

The screenshot shows the 'Administration -> Workgroups' window. The left sidebar lists '45WG', 'Administrator - PPM2000 Workgro', and 'Advanced Users'. The main area is titled 'Workgroups' and contains a search bar, a toolbar with 'Save', 'Add', 'Edit', 'Delete', and 'Cancel', and a list of workgroups. The 'Advanced Users' workgroup is selected, showing its details: 'Workgroup Name' is 'Advanced Users', 'Organization' is 'Advanced Security Inc.', and 'Workgroup Description' is 'The members of this workgroup have advanced security rights.' Below this, there are fields for 'Identifier Prefixes': 'Incident Prefix' is 'INC', 'Case Prefix' is 'CASE', and 'Activity Prefix' is 'ACT'. A checkbox 'Enable Imports to this Workgroup' is checked. The 'Gateway' tab is active, showing 'Import Key' as 'ppm2000'. Under 'Incident Settings', 'Incident Prefix' is 'WEB' and 'Incident Identifier Format' is 'CCYY-MM-####'. There are two sections for retention periods: 'Accepted Retention Period' and 'Deleted Retention Period'. Each has radio buttons for 'Keep indefinitely' and 'Delete after 90 days'. The 'General Record Settings' section has a checkbox for 'Auto Accept' and two sections for retention periods: 'Available Retention Period' and 'Added Retention Period', each with radio buttons for 'Keep indefinitely' and 'Delete after 90 days'.

Assign Access Rights to a Gateway Administrator or Gateway Approver

1. Select **Users** in the Navigation pane.
2. Select the correct user from the list, and click **Edit**. By default, the General tab will open.
3. Open the **User Rights** sub-tab.
4. Check the **Gateway Administrator** box or the **Gateway Approver** box to grant the user access to their associated Gateway functions.

5. Click **Save**. The next time the designated Gateway Administrator or Gateway Approver logs on to Perspective, they will be able to access the Gateway component from the Navigation pane.

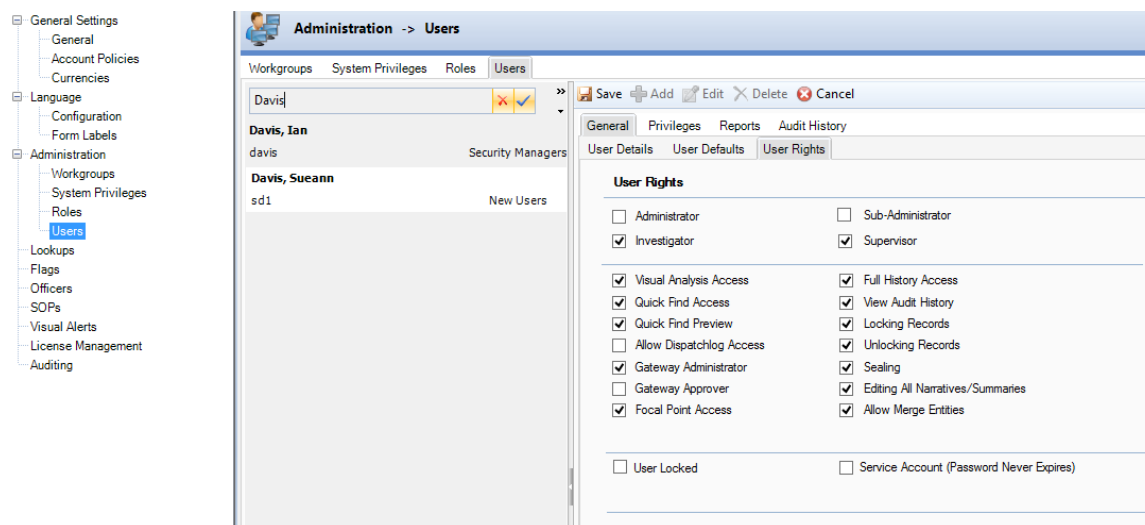

Administrative Reports

Perspective contains a number of pre-set reports that you may use to generate statistics and analyze trends in your data, and many of them have been designed specifically for Administrators.

For information on the types of reports available in Perspective, including administrative reports, and on how to generate reports, please, refer to the "Reports" section of the *Perspective User's Guide* or online User Help.

To read more about administering report access for roles and users, see [Set Report Visibility for a Role](#) and [Set Report Visibility for a User](#) in the "Roles" and "Users" sections of this guide.

Service Manager

The Service Manager is an external application available only on the Web server hosting Perspective services. It is used to manage configuration files, databases, licenses and keys, as well as to set up the following features:

- **Email Notifications:** Perspective's default email settings can be configured for SMTP integration.
- **Attachment Sizes:** The maximum attachment size allowable in Perspective (up to 2 GB) can be tailored to your organization's needs.

Note: Microsoft SQL Server® 2005 Express (supported for the Standard Edition of Perspective only) has a maximum attachment allowance of 50 MB.

- **Quick Find Indexing:** The Quick Find tool requires regular indexing of your Perspective database for search accuracy.
- **User Defined Fields:** User defined fields can be added to the Incident, Case (Perspective Premium only), Item, Person, Organization and Vehicle forms under the General tab; to the Incident and Case forms under the Controls tab; and to the Incident form under the Involved Persons, Involved Items, Involved Organizations, Involved Vehicles and Investigation Details tabs.
- **Custom Search Integration:** With the Custom Search feature, you can launch the Infoglide Identity Resolution Engine™ (IRE) from Perspective to search several data sources at once.
- **Mass Notification:** With the mass notification feature, you can integrate your MIR3SM inEnterpriseTM solution into Perspective in order to launch notification via Perspective DispatchLog. This will require the Service URL, User Name and Password provided by MIR3
- **Integration Services URL:** To enable event trigger in Integration Services, enter the URL set up with the Integration Services.

For further information on any of the features listed above, including detailed setup instructions, please, refer to the *Perspective Installation Guide*.

Index

A

Access Levels	
About	8
Role	25
System	20
User	35
Administration	
Gateway	<i>See also Gateway Administration</i>
Navigation	7
All Records View	14
Audit Logs	
System Level	48
User Level	42
Authentication	2

C

Child Field	51
Currencies	
Role Level	25
System Level	17
User Level	35
Custom English	50, 76
Custom Search	
Access for Roles	26
Access for Users	37
Setting Up	83

D

Discrepancies	
Role vs. User Report Visibility	32
Role vs. User Rights	31
System vs. Role and User Rights	22

E

Emails	
Formatting	15
Setting Up Notifications	83

F

Flags	
-------	--

Adding	59
Focal Point	
Access for Roles	26
Access for Users	37
Fonts	14
Form Labels	
Creating a Single Label Set	76
Creating Multiple Label Sets	76

G

Gateway Administration	
Designating Administrators and Approvers	80
e-Reporting Access Options	78
Importing Options	19, 78
Gateway Administrator	
Access for Roles	27
Access for Users	38
Designating	80
Gateway Approver	
Access for Roles	28
Access for Users	38
Designating	80

I

Integration Services	83
----------------------------	----

L

Languages	
Role Level	25, 35, 76
System Level	76
User Level	35, 76
Legal Notices	14
Logon Options	
Displaying Legal Notices	14
Displaying Privacy Statements	14
Password Parameters	15
Perspective Authentication	2
Setting for User	34
Lookups	
Adding Flags	59
Addresses for Site Rollups	55
Call Codes for Call Category Rollups	54
Multi-Tier	50

Multi-Tier/Hierarchical Lists	51	Workgroup Level Cover Page	19
Setting Workgroup Visibility	53	Rights	
Single-Tier	50	Assigning to Roles	26
Single-Tier Lists	50	Assigning to Users	37
M		Roles	
Mass Notifications	83	About	9
Measurement System		Access Privileges	29
System Level	13	Accessing Custom Search	26
User Level	36	Accessing Focal Point	26
O		Accessing Quick Find	26
Officers		Accessing Visual Analysis	26
Adding	44	Adding	24
Organizational Rollups		Currency	25
About	8	Discrepancies from System Rights	22
Role Level	25	Discrepancies from User Report Visibility	32
Setting Workgroup Visibility	53	Discrepancies from User Rights	31
User Level	35	General Rights	26
P		Language	25
Parent Field	51	Security Controls	25
Password Parameters	15	Setting Report Visibility	32
Perspective Editions	1	Setting System Visibility	29
Perspective Services URL	3	Rollups	
Privacy Statements	14	Entering Addresses for Site Rollups	55
Privileges		Entering Call Codes for Call Category Rollups	54
Assigning to Roles	29	GeoRollups Visibility for e-Reporting	78
Assigning to Users	40	Modifying	51
Q		Organizational	See also Organizational Rollups
Quick Find		Root	51
Access for Roles	26	S	
Access for Users	37	Security Layers	8
Indexing	83	Service Manager	83
R		Settings	
Regulated Time to Act (RTA)	70	Creating	8
Reports		Deleting	8
About	82	Editing	8
Incident Site Addresses	56	Saving	8
Setting Visibility for Roles	32	Sibling Field	51
Setting Visibility for Users	42	Single sign-on	6
System Level Cover Page	14	SOP	
User Level Cover Page	35	Add a Checklist	62
		Add a Link	65
		Attach a File	63
		Create a New Rule	61
		Set Up Notifications	66
		SSO	6
		System Administration	
		Audit Logs	See also Audit Logs

Components	10
Flags.....	59
Form Labels	See also Form Labels
General Settings	See also System Settings
Lookups	See also Lookups
Officers	See also Officers
Roles	See also Roles
Security Layers.....	8
Standard Operating Procedures	See also SOP
System Privileges	See also System Privileges
Users.....	See also Users
Visual Alerts.....	See also Visual Alerts
Workgroups.....	See also Workgroups
System Privileges	
Access Rights	20
System vs. Role and User Discrepancies.....	22
Visibility	20
System Settings	
About.....	9
Activity Numbering.....	13
Activity Prefixing.....	13
Attachment Sizes	83
Case Numbering	13
Case Prefixing	13
Currencies.....	17
e-Incident Numbering	79
e-Incident Prefixing	79
Fonts.....	14
Formatting Emails.....	15
Hiding All Records View	14
Incident Numbering.....	13
Incident Prefixing.....	13
Measurement System	13
Notes upon Logon	14
Password Parameters.....	15
Report Cover Page.....	14
User Defined Fields.....	83

U

Users	
About.....	9
Access Privileges.....	40

Accessing Custom Search.....	37
Accessing Focal Point	37
Accessing Quick Find	37
Accessing Visual Analysis	37
Adding.....	34
Audit Logs	42
Currency.....	35
Discrepancies from Role Report Visibility	32
Discrepancies from Role Rights.....	31
Discrepancies from System Rights	22
Gateway Administrators	80
Gateway Approvers	80
General Rights.....	37, 80
Language.....	35
Report Cover Page	35
Security Controls.....	35
Setting Report Visibility.....	42
Setting System Visibility	40

V

Visual Alerts	
Add Officer Alert	72
Add RTA Alert.....	70
Define Visual Representation of Certain Data Types ...	68
Visual Analysis	
Access for Roles	26
Access for Users	37

W

Workgroups	
About	8
Activity Prefixing	19
Adding.....	19
Assigning to Roles	25
Assigning to Users.....	35
Case Prefixing.....	19
e-Reporting Access Options	78
Importing Options.....	19, 78
Incident Prefixing	19
Lookup List Visibility.....	53
Report Cover Page	19

Contact Information

Technical Support

Toll Free: 1-877-776-2995
Phone: (780) 448-0616
Email: support@resolver.com
Website: <https://support.resolver.com>

Resolver Inc.

Toll Free: 1-888-776-9776
Phone: (780) 448-0616
Fax: (780) 448-0618
Email: information@resolver.com
Website: <http://www.resolver.com>